


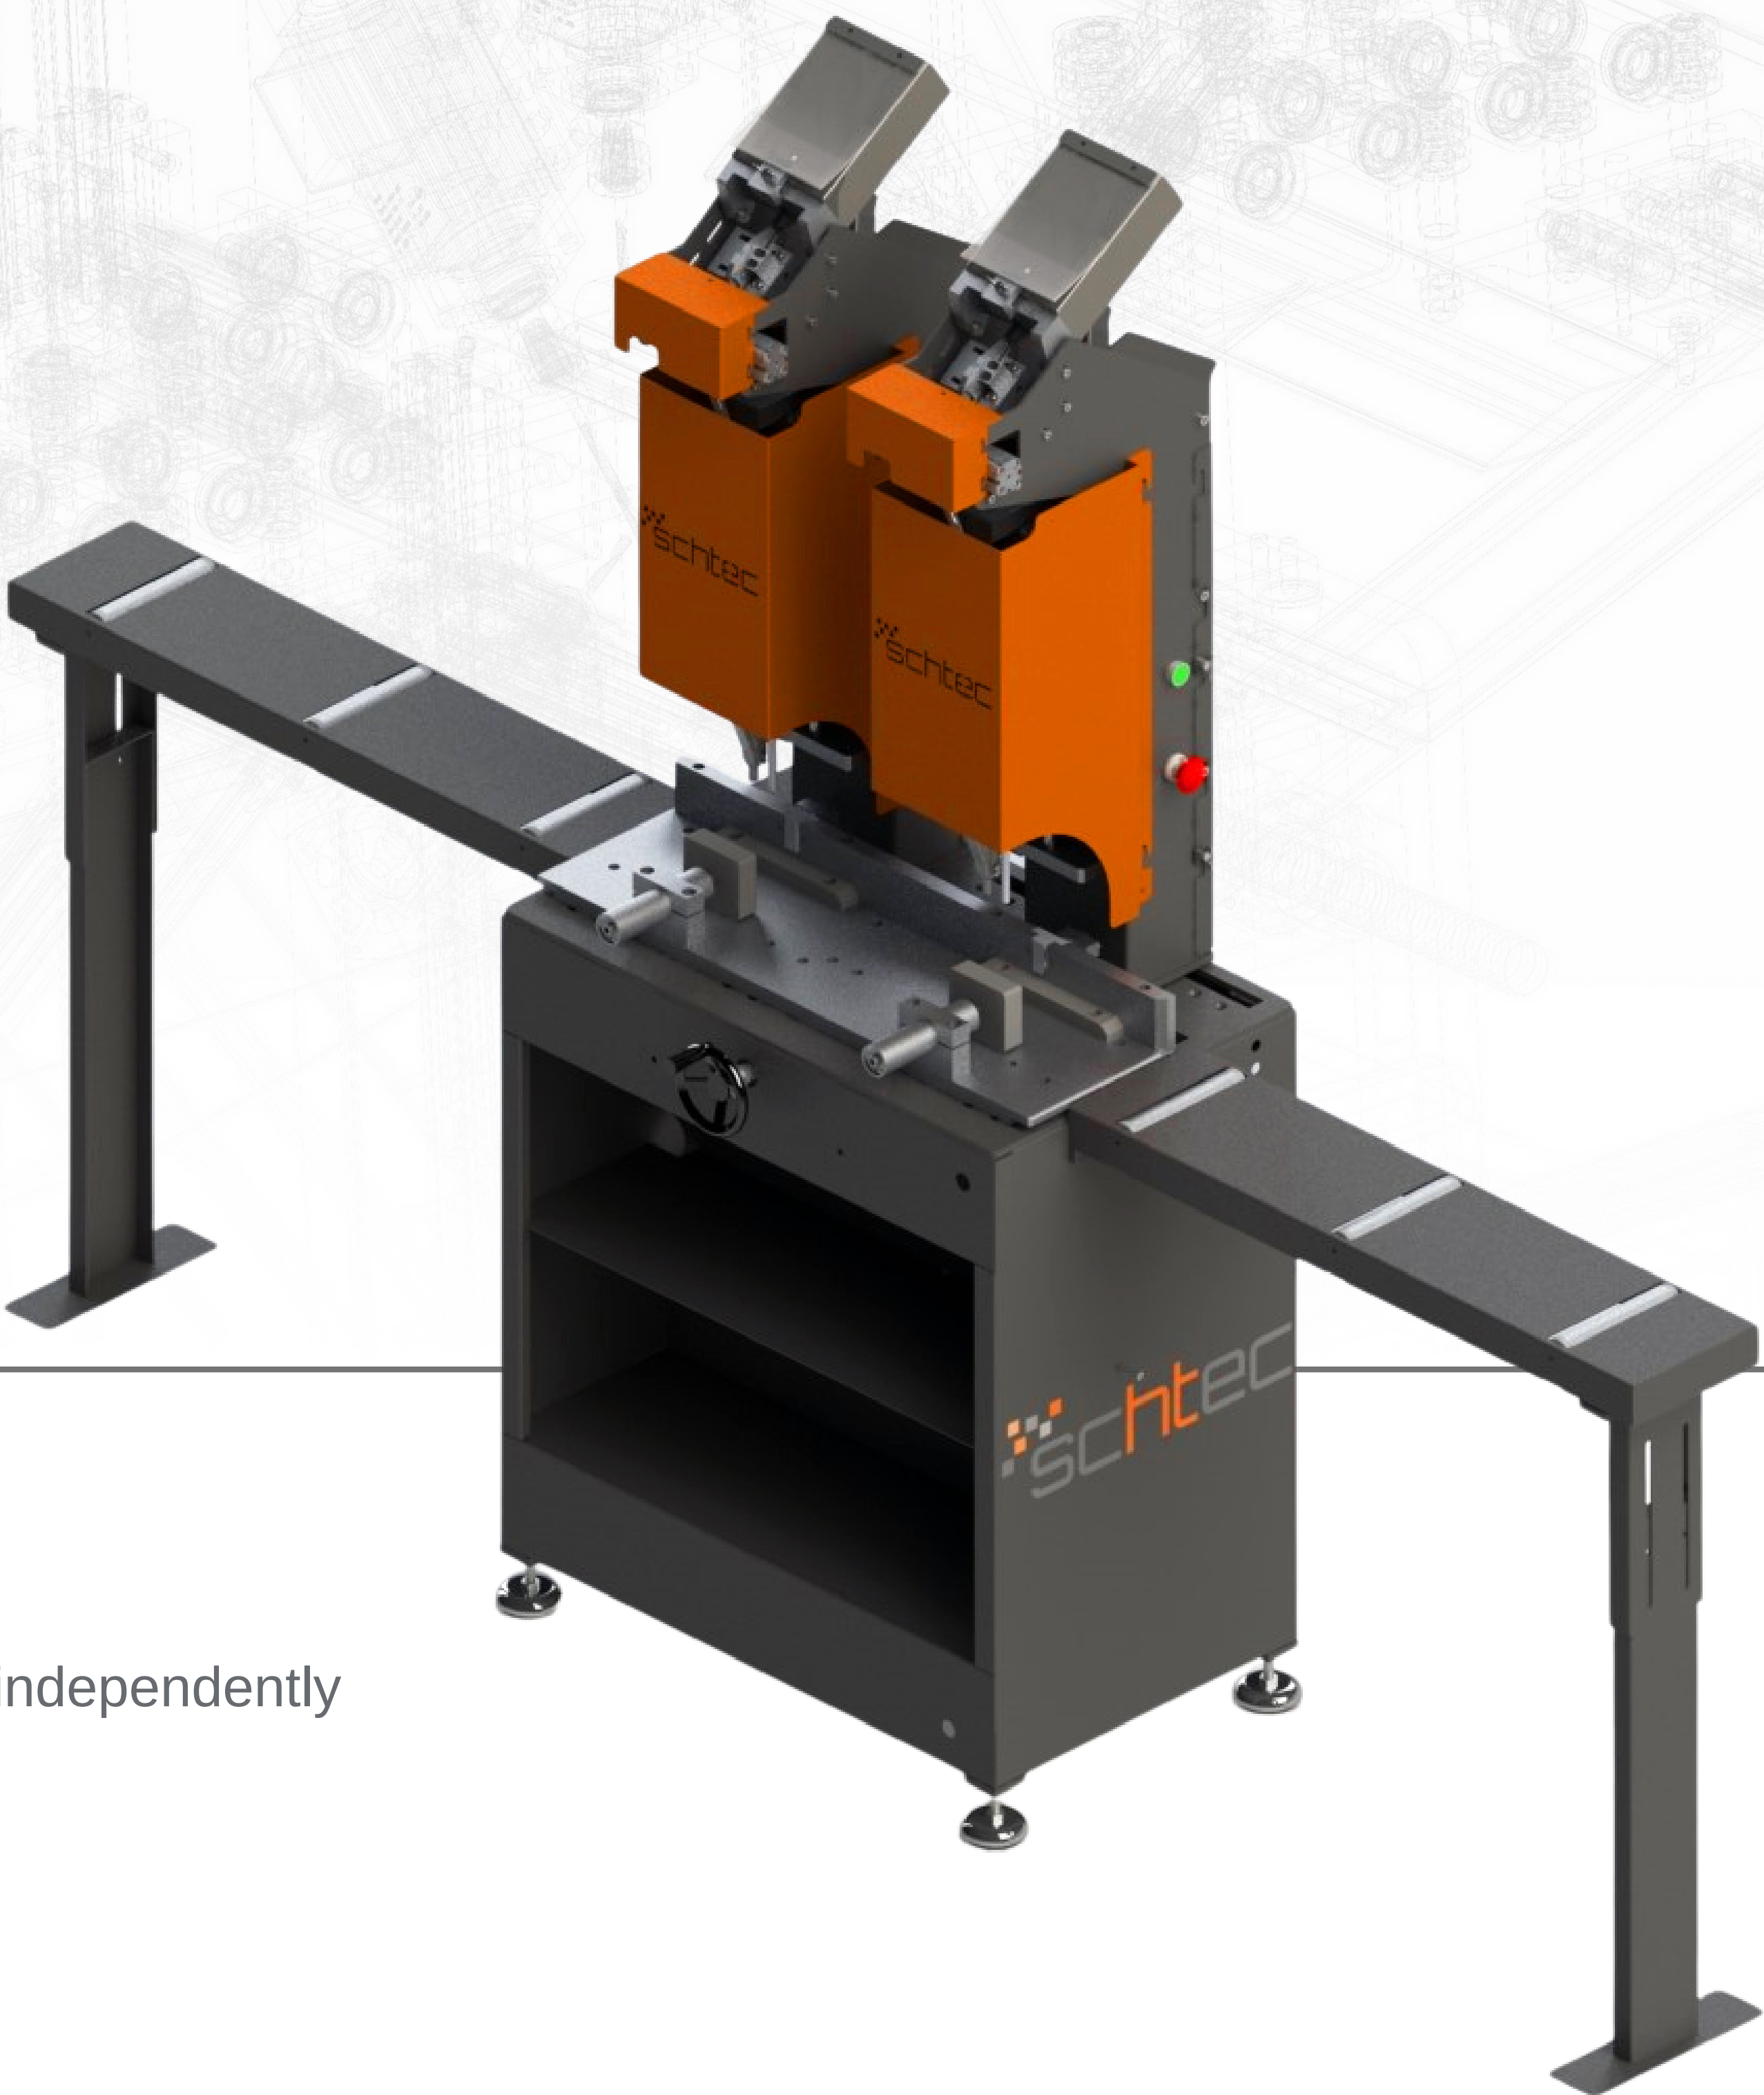


RS 172

Double Head Vertical Reinforcement
Screwing Machine

Standart Features

- Pneumatic automatic screw feeding unit
- Screwing heads can operate simultaneously or independently
- Automatic stop after the screwing process
- Foot pedal control for flawless screwing
- Safety switch to prevent faulty operation
- Special screw height adjustment switch
- Automatic profile clamping during screwing
- Adjustable range stop with profile support
- Long-lasting bit usage and easy replacement
- Adjustable torque according to screw type
- Average screwing speed: 1.5 sec/piece (for each head)

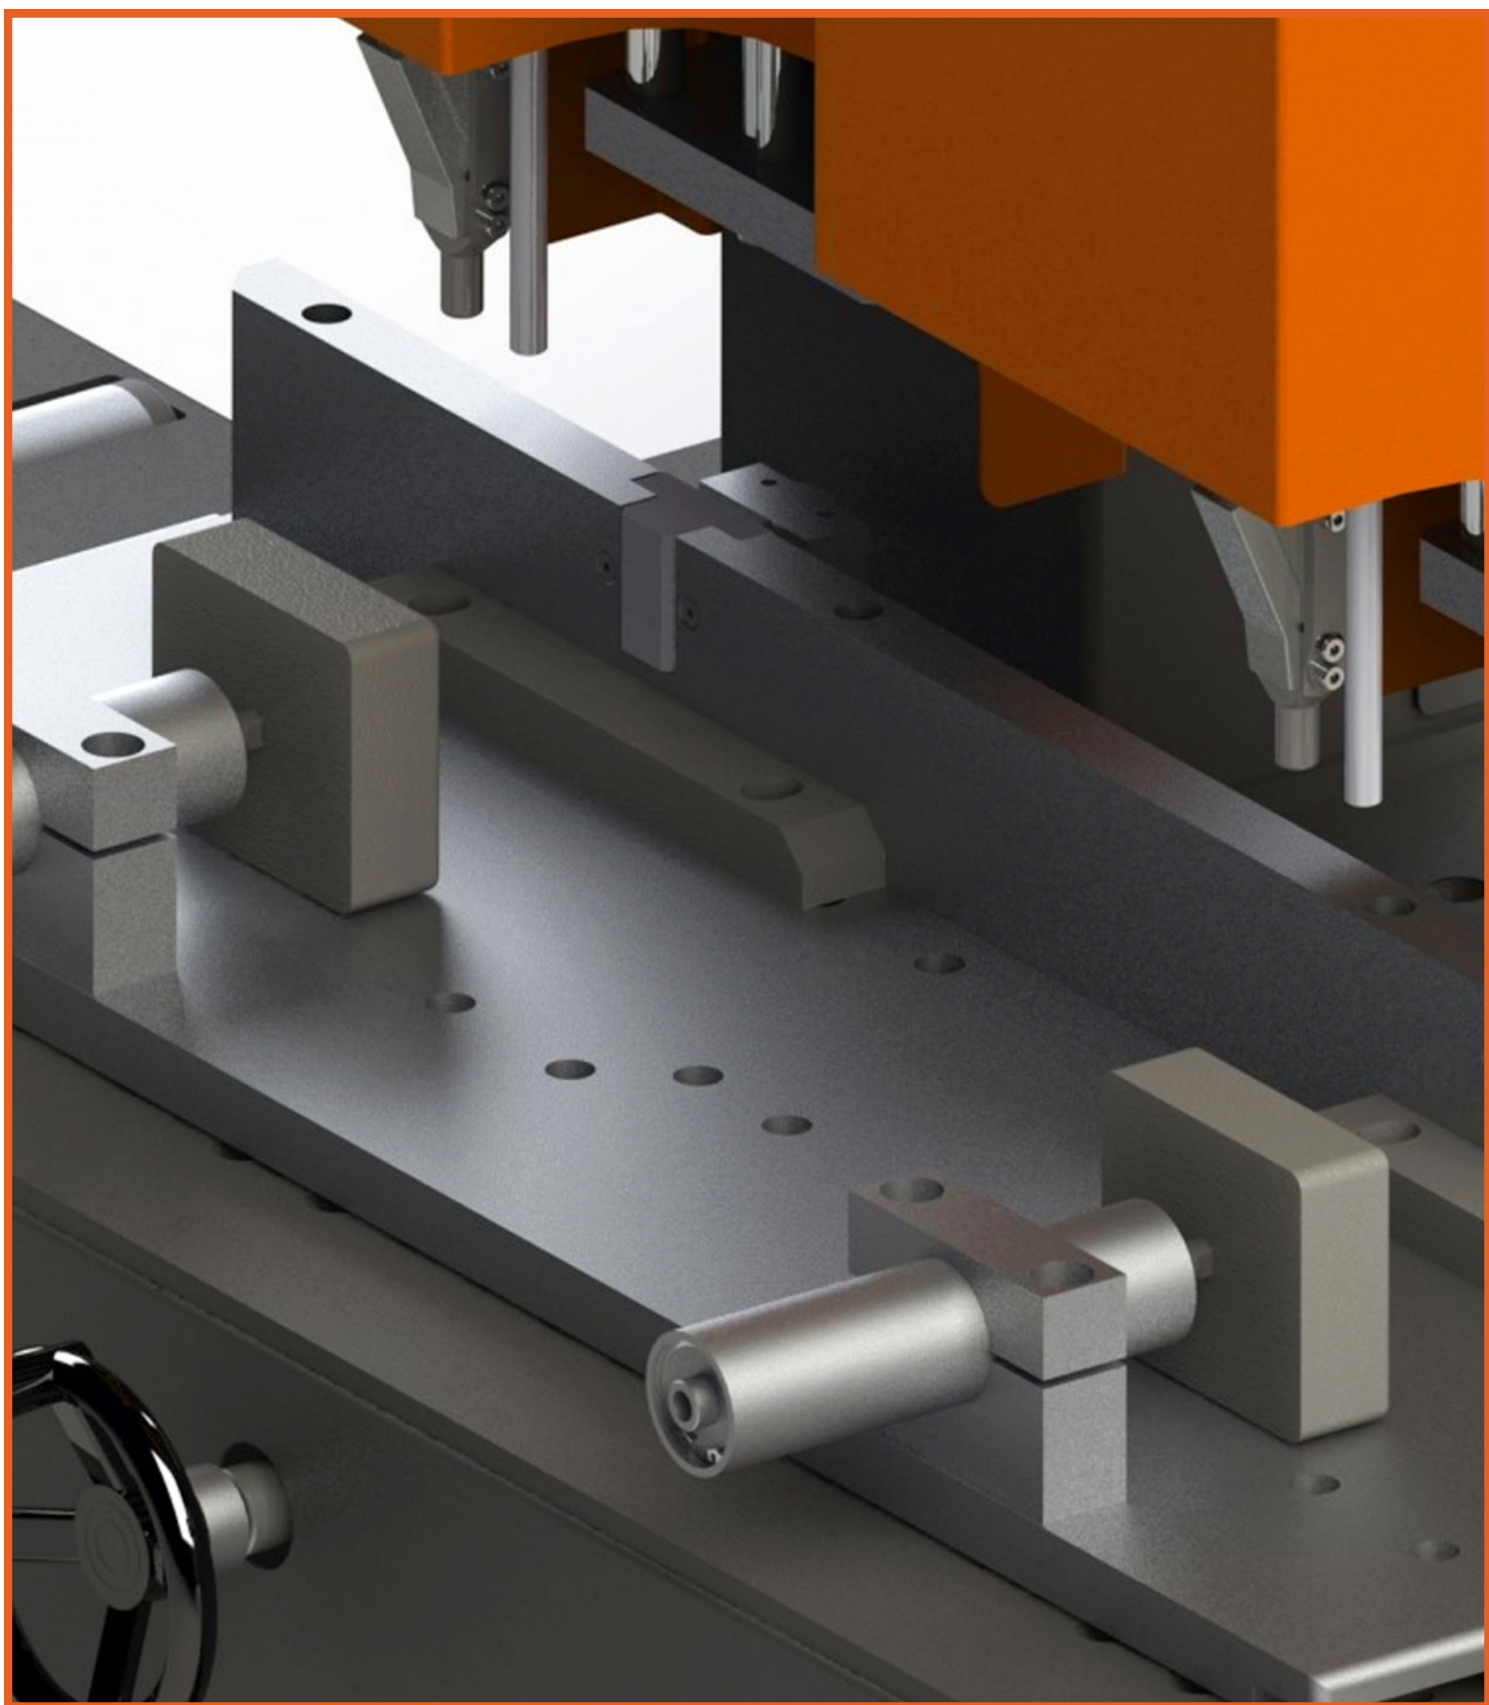

RS 172 Technical Specifications

Air Pressure	6-8 bar
Air Consumption	75 lt./min.
Machine Height	1.560 mm
Machine Length	1.550 mm
Machine Width	915 mm
Machine Weight	185 kg
Motor Power	2 kW
Voltage	220 V, 1 Ph, 50-60 Hz
Air Pressure	6-8 bar
Air Consumption	16 lt./min
Max. Profile Width	130 mm
Min. Profile Width	15 mm
Machine Height	2,000 mm
Machine Length	500 mm (2,230 mm with conveyor)
Machine Width	610 mm
Machine Weight	150 kg