



PVC & Aluminium Profiles Processing Machinery



www.schtec.com



Schtec Machine which was incorporated on 02.08.2013 with our team with average experience of 17-18 years in the sector, has started to serve PVC & Aluminium door and window sector from different perspective.

Schtec, with the experience and accumulated knowledge in years, has realized the firsts in Turkey in the field of PVC & Aluminium. Processing Machines and submitted them to the disposal of our esteemed customers. The company was incorporated for the purpose of operating with an experienced team having wide technical knowledge in the sector with a big portfolio of sales and for taking advantage of our customers from the innovations, which such experience has brought forward as well as the high-tech machinery.

Schtec is realizing production of machinery in international standards with the quality-focused philosophy of production with the high technology that it uses at every stage of production.



"where quality and technology combine with experience" 



Index

Schtec	2-3
Cutting Machines	
SD 140 Automatic Double Head Cutting Machine	6 - 7
DCA 435 Servo Controlled Automatic Double Head Cutting Machine	8 - 9
DCA 460 Servo Controlled Automatic Double Head Cutting Machine	10 - 11
SG 100 / SG 110 Glazing Bead Saw	12 - 13
SS 110 Single Head Cutting Machine	14
Milling and Drilling Machines	
WS 220 Automatic Triple Water Slot Router	15
RC 208 Copy Router Machine	16
RC 210 Copy Router Machine with Triple Drill	17
ACR 215 One-Spindle Copy Router Machine	18
End Milling Machines	
MT 250 Automatic End Milling Machine	20
MT 256 Multiple End Milling Machine	21
Corner Crimping Machines	
CP 290 Corner Crimping Machine	22
ACP 295 Automatic Servo-Controlled Corner Press for Aluminum Profiles	23
Profile Machining and Cutting Centers	
SMC 330-AL Aluminium Profile Processing & Cutting Center	24 - 25
MCALS 650 Profile Machining Center	26 - 27
SMC 305 Profile Machining Center	28 - 29
SMC 308 Profile Machining Center and Cutting Center	30 - 31
SMC 310 Profile Machining Center and Cutting Center	32 - 33
SMC 320 Profile Machining Center and Cutting Center	34 - 35
SMC 360 Profile Machining Center and Cutting Center	36 - 37
SVMC 120 Profile Machining Center and Cutting Center	40 - 41
CSML 240 Fully Automated Processing Center	42 - 43
Screwing and Triple Drilling Centers	
RS 225 Profile Screwing Center	44 - 45
RS 235 Fully Automatic Double Screwing and Triple Drilling Center	46 - 47
Reinforcement/Steel Screwing Machines	
RS 171 Vertical Reinforcement/Steel Screwing Machine	48
RS 172 Double Head Vertical Reinforcement Screwing Machine	49
RS 173 Reinforcement Screwing and Mounting Hole Drilling Machine	50
RT 176 Automatic Mullion Connector Screwing Machine	51
Welding Machines	
WD 710 Single Welding Machine	52
WD 720 Double Welding Machine	53
WDV 724 Four Head Inline Welding Machine	54
WM 740 Four Head Welding Machine	56 - 57
WM 750 Four Head Welding Machine	58 - 59
Welding and Cleaning Automation Lines	
SSL 1 - SSL 1 / SP Four Head Welding and CNC Corner Cleaning Automation Line	60 - 61
TS 820 Turning Station With Robotic Arm	60 - 61
CS 810 Cooling and Buffer Station	60 - 61
Corner Cleaning Machines	
CC 254 Corner Cleaning Machine	62
CM 610 CNC Corner Cleaning Machine	63
CM 620 CNC Corner Cleaning Machine	64
Accessory Assembly Machines	
GA 300 Glass Assembly Machine	65
SA 280 Sash Assembly Station	66
Machine Layout Plans	68 - 73
Our Solution Partners	74




SD 140

Automatic Double Head Cutting Machine

- High precision cutting of PVC and Aluminium profiles.
- Strong construction, linear rail and sliding-bearing system for precise length and angle.
- The saw heads tilt automatically for 45° and 90° cutting and easy manual fixation for Intermediate angles.
- Two pieces of 80mm. dropper sash profiles can be cut in the same time with 500 mm saw blade.
- Easily adjustable blade cutting speed.
- Data transfer via local network connection or USB port.
- Profile support system to balance processed piece.
- Ergonomic design for ease of use.
- Self-closing protective covers for work safety.
- Vertical and horizontal pneumatic profile clamping system for the best fixation.
- The left head of the machine is fixed and the right head moves on the chassis.

Optional

- Barcode printer system. (BP 922)
- Cooling system to cut Aluminium profiles (LS 940) and hydro-pneumatic system to cut Aluminium profiles.
- Automatic Aluminium wedge cutting system. (AF 942)

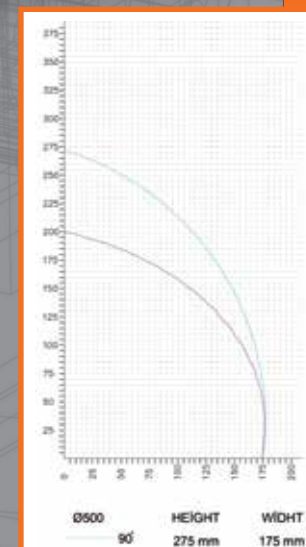

Technical Specifications:

Power Supply	: 400 V, 3 Ph, 50-60 Hz
Total Power	: 8.5 kW, 21.25 A
Power Output of Each Motor	: 2,2 kw
Spindle Speed	: 3.000 rpm
Max.Cutting Length	: 4.500 mm (Up to 6500mm with software support)
Min. Cutting Length	: 500 mm (Up to 450 mm with software support)
Air Pressure	: 6-8 bar
Air Consumption	: 50 lt./min.
Machine Height	: 1.800 mm
Machine Length	: 5.850 mm
Machine Width	: 1.595 mm
Machine Weight	: 1.000 kg






DCA 435

Servo Controlled Automatic Double Head Cutting Machine

- Cutting of Aluminum profiles with high speed and precision thanks to 3-axis servo system.
- Strong construction, linear rail and sliding-bearing system for precise length and angle.
- Industrial PC Based Servo Control System, 10 touch screen. (Beckhoff)
- Ethercat based controlled drivers and high-torque servo motors.
- Remote desktop connection by way of Wifi or Network connection.
- File transfer via USB or Network.
- Central lubrication system.
- All error messages can be seen on the machine screen with the interface program which developed by SCHTEC Software R&D Department.
- Remote connection method and problem detection and solution by connecting to all automation system.
- High angle accuracy thanks to cycloid gap Free gearbox.
- Profile height automatically transferred From profile data.
- Automatic aluminum corner block cutting.
- Cooling system to cut Aluminium profiles.
- Hydro-pneumatic system to cut Aluminium profiles.
- The saw heads tilt automatically between 45° and 135° by servo motors.
- Machine can make single cuts.
- Adjustable saw cutting speed.
- Profile support conveyor is available on the machine as standard.

Optional

- Barcode printer system. (BP 922)

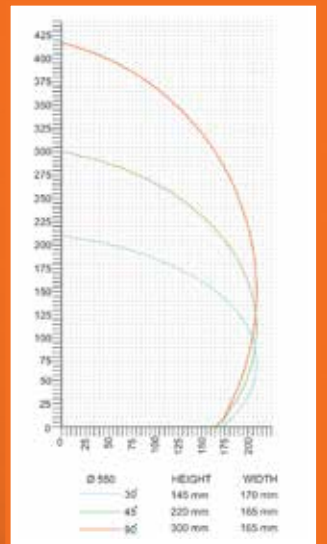

Technical Specifications:

Power Supply	: 400 V, 3 Ph, 50-60 Hz
Total Power	: 7.2 kW
Power Output of Each Motor	: 3 kW
Diameter of Saw Blade	: 550 mm
Saw Blade Speed	: 2800 rpm/min
Cutting Length	: 250 mm - 6500 mm
Air Pressure	: 6-8 bar
Air Consumption	: 60 lt./min.
Machine Height	: 1.935 mm
Machine Length	: 8.100 mm
Machine Width	: 1.950 mm
Machine Weight	: 2.650 kg



DCA 460


Servo Controlled Automatic Double Head Cutting Machine

- Cutting of Aluminum profiles with high speed and precision thanks to 3-axis servo system.
- Strong construction, linear rail and sliding-bearing system for precise length and angle.
- Industrial PC Based Servo Control System, 10 touch screen. (Beckhoff)
- Ethercat based controlled drivers and high-torque servo motors.
- Remote desktop connection by way of Wifi or Network connection.
- File transfer via USB or Network.
- Central lubrication system.
- All error messages can be seen on the machine screen with the interface program which developed by SCHTEC Software R&D Department.
- Remote connection method and problem detection and solution by connecting to all automation system.
- High angle accuracy thanks to cycloid gap free gearbox.
- Profile height automatically transferred from profile data.
- Automatic aluminum corner block cutting.
- Cooling system to cut Aluminium profiles.
- Hydro-pneumatic system to cut Aluminium profiles.
- The saw heads tilt automatically between 22° and 158° by servo motors.
- Machine can make single cuts.
- Adjustable saw cutting speed.
- Profile support conveyor is available on the machine as standard.



Opsiyonlar


- Barcode printer system. (BP 922)

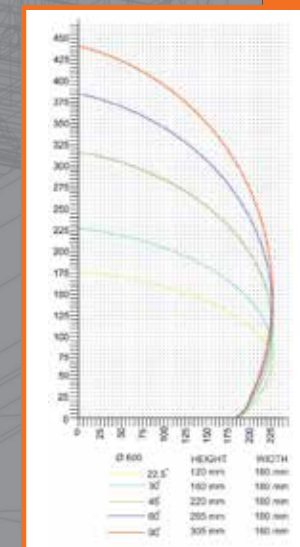

Technical Specifications:

Power Supply	: 400 V, 3 Ph, 50-60 Hz
Total Power	: 7.2kW
Power Output of Each Motor	: 3 kW
Diameter of Saw Blade	: 600 mm
Saw Blade Speed	: 2800 rpm/min
Cutting Length	: 250 mm - 6500 mm
Air Pressure	: 6-8 bar
Air Consumption	: 60 lt./min.
Machine Height	: 1.935 mm
Machine Length	: 8.100 mm
Machine Width	: 1.950 mm
Machine Weight	: 2.650 kg



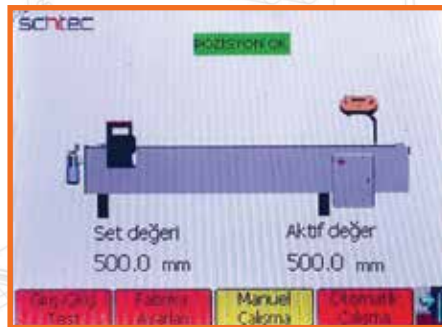

MD 272 (Optional)

Electronic Digital Measuring Device (SG 100 - SG 110)

- Digital ruler with 0,1 mm accuracy for measuring glazing bead profiles.
- Measures up to 2 m with its special design (3 m with the extension part).
- Measured data is transferred to the machine with WIFI and stored in the machine.
- Measured data is cut in the order it is received, thus preventing any confusion, and the used data is marked on the machine.
- The motions of the machine can be simulated visually through high-tech 16 million color TFT LCD operator.



SG 100 / SG 110

Glazing Bead Saw

- High precision cutting of PVC glazing bead profiles at 45°.
- Two glazing bead profiles can be cut at the same time with a specially designed mould.
- Practical mould change system.
- Adjustable blade speed.
- Vertical pneumatic profile clampings system For high precision cutting.
- Manual Measurement system and profile support conveyor are standard equipment of the machine.

Optional

- Practical mould rolling system (SG 110)
- Automatic digital measurement system and 3m conveyor (MA 270)
- Electronic Digital Measuring Device (MD 272)
- Manual Measurement Conveyor for SG100 - SG110 (GC 265)

Technical Specifications:

Power Supply	: 400 V, 3 Ph, 50-60 Hz
Total Power	: 1,5 kw {0,75 kw x 2}, 3.75A
Output Air Pressure	: 6-8 bar
Air Consumption	: 70 lt. /min.
Spindle Speed	: 3.000 rpm
Saw Blade Diameter	: Ø200 mm X 2 / Ø100 mm X 2
Max. Cutting Length	: 3.000 mm
Min. Cutting Length	: 230 mm
Machine Width	: 1.210mm
Machine Height	: 1.040 mm
Machine Length	: 550 mm (+ 4.775 mm Manual Conveyor System)
Machine Weight	: 180 kg


MA 270 (Optional)

Automatic Measurement System (SS110)

- 0,1mm precision cut capability with measurements entered via an WIFI connected ruler or via the operator panel.
- Special mechanical design with stepper motor controlled and linear slide bearing system provides high speed resistance and accurate and fast positioning.
- Operator panel with Industrial Windows CE operating system and PLC controller system Data transfer in CSV format via WIFI connection or USB Port directly.
- Parameters such as cutting length, number of cuts and item numbers can be edited and changed via the operator panel.
- Unlimited number of cut-lists can be entered, and each cut-list can contain up to 1000 cuts.
- Can be used along with Glazing Bead Saw Machine, Single Head Machine and other similar applications.
- Height adjustment can be done easily For the machine For which it will operate with.

Technical Specifications:

Power Supply	: 230 V, 1 Ph, 50-60 Hz
Total Power	: 6A NEMA34 Stepper Motor
Max. Profile Length	: 3.300 mm
Min.Cutting Length	: 260 mm
Machine Height	: 1.400 mm - 1.500 mm (Adjustable)
Machine Width	: 570 mm
Machine Length	: 3.750 mm
Machine Weight	: 192 kg





SS 110 Single Head Cutting Machine

- It cuts Aluminum and PVC profiles.
- Pneumatic undercut 500 mm. saw blade.
- Adjustable saw speed.
- Wide angle range from 20° to 160°
- Special fixing points for easy adjustment at 20°, 30°, 45°, 90°, 135°, 150° and 160° angles.
- Vertical pneumatic clamping pistons will fix profile in the best way.
- Right-Left profile support conveyor is provided as standard.



Opsiyonlar

- Cooling system to cut Aluminium profiles. (LS 930)
- Automatic Digital Measurement System. (SS 11 - MA 270)
- Manual Measurement Conveyor for SG100 - SG110 (GC 265)



Technical Specifications

Power Supply	: 400 V, 3 Ph, 50-60 Hz
Total Power	: 3 kW
Diameter of saw	: 500 mm
Spindle Speed	: 2.800 rpm
Air Pressure	: 6-8 bar
Air Consumption	: 90 lt./min.
Machine Height	: 1.350 mm
Machine Length	: 1.100 mm (with conveyor 7.000 mm)
Machine Width	: 960 mm
Machine Weight	: 430 kg



WS 220 Automatic Triple Water Slot Router

- Moved with three motors, opens water drain slots including angled, horizontal and vertical slots on PVC profiles.
- Has three of high speed frequency controlled motors.
- Motors can work independently of each other.
- Independently adjustable routing speed for each motor.
- Pneumatic profile clamping.
- Fixed motors, movable main tray.
- Profiles can be placed vertically or horizontally.
- Fast angle changing system for angled motors.
- Thanks to the arm mechanism used, the motor positions can be adjusted quickly and practically.
- Ventilation hole or drain slots selection.



Technical Specifications

Power Supply	: 230 V, 1 Ph, 50-60 Hz
Total Power Output	: 1,65 kw (0,55 kw x 3), 3.75A
Air Pressure	: 6-8 bar
Air Consumption	: 38 lt./min.
Roter Spindle Speed	: 18.000 rpm
Routing length Max.	: 40 mm
Routing Stroke	: 30 mm
Machine Width	: 1.210 mm
Machine Height	: 1.040 mm
Machine Length	: 550 mm
Machine Weight	: 280 kg





RC 208 Copy Router Machine

- Opens tilt system channel, drain slot, lock cylinders and door handle holes on PVC and Aluminium profiles.
- 1:1 ratio pattern transfer onto a profile from a template.
- Milling process is done by A high speed frequency controlled motor.
- Milling with adjustable measurement apparatus without using a template.
- Special coated long lasting drillers.
- Using 2 different size (5 mm - 8 mm) bits on single template with 2 different step.
- Pneumatic Profile Clamping.



RC 210 Copy Router and Triple Drilling Machine

- Opens tilt system channel, drain slot, lock cylinders and door handle holes on PVC and Aluminium profiles.
- 1:1 ratio pattern transfer onto a profile from a template.
- Milling process is done by A high speed frequency controlled motor.
- Milling with adjustable measurement apparatus without using a template.
- Triple drilling holes done with reinforcement metal on PVC profiles.
- Special coated long lasting drillers.
- Using 2 different size (5mm-8mm) bits on single template with 2 different step.
- Pneumatic Profile Clamping.



Optional

- Cooling system for aluminium profiles. (CA 944)
- Left and right measurement centering system.



Technical Specifications

Power Supply	: 400 V ,3 Ph,50-60 Hz
Power Output Router	: 0,75 kw, 2A
Air Pressure	: 6-8 bar
Air Consumption	: 15 lt. /min.
Router Spindle Power	: 0,75 kw
Router Spindle Speed	: 12.000 rpm
Routing Capacity	: 250 X 120 mm
Max Routing Length	: 250 mm
Max Routing Depth	: 120 mm
Max Profile Dimension	: 110 mm x 120 mm
Machine Width	: 720 mm (+ 1.000 mm Left and Right Centering System)
Machine Height	: 1.470 mm
Machine Length	: 1.050 mm
Machine Weight	: 125 kg

Optional

- Cooling system for aluminium profiles. (CA 944)
- Left and right measurement centering system.



Technical Specifications

Power Supply	: 400 V, 3 Ph, 50-60 Hz
Power Output Router	: 1,85 kw, SA
Air Pressure	: 6-8 bar
Air Consumption	: 15 lt. /min.
Router Spindle Power	: 0,75 kw
Router Spindle Speed	: 12.000 rpm
Triple Drilling Motor Power	: 1,1 kw
Triple Drilling Motor Speed	: 900 rpm
Routing Capacity	: 250 X 120 mm
Max Routing Length	: 250 mm
Max Routing Depth	: 120 mm
Max Profile Dimension	: 110 mm x 120 mm
Machine Width	: 720 mm (+ 1.000 mm Left and Right Centering System)
Machine Height	: 1.470 mm
Machine Length	: 1.050 mm
Machine Weight	: 160 kg

schtec One-Spindle Copy Router



ACR 215 One-Spindle Copy Router

- Opens tilt system channel, drain slot, lock cylinders and handle holes on Aluminium profiles.
- Working table can be quickly and easily positioned pneumatically at $-90^\circ / 0^\circ / +90^\circ$.
- Pneumatic copying probe comes with three diameters 5/8/10 mm.
- Pneumatic design that easily allows the spindle to stay in the required height position)
- Equipped with 4 mobile pneumatic clamps.
- Milling process is done by a frequency controlled high speed motor.
- Router spindle speed is changeable via frequency inverter . (from 2800 to 6000 rpm)
- One copy template for standard processing.
- 1:1 ratio pattern transfer into a profile from a template.
- Manual operation.



Optional

- Raw template that can be designed as needed.



Technical Specifications

Power Supply	: 230 V, 1 ph, 50-60 Hz
Total Power	: 1,25 kw, 5,5 A
Air Pressure	: 6-8 Bar
Air Consumption	: 20 lt. / min.
Router Spindle Speed	: 6.000 rpm
Max. Profile Dimensions	: 175x135
Machine Width	: 1550 mm
Machine Height	: 2100 mm
Machine Length	: 1750 mm
Machine Weight	: 400 kg



schtec



MT 250 Automatic End Milling Machine

- End milling of the PVC and Aluminium transom profiles with high quality and precision.
- Automatic end milling process.
- Two different series of transom profiles can be processed automatically, no time loss, no need to change the settings nor the cutter set.
- Vertical and horizontal pneumatic profile clamping system.
- Adjustable saw blade feed speed.
- Possibility to process at different angles up to 45°.



MT 256 Multiple End Milling Machine

- End milling of the PVC transom profiles with high quality and precision.
- Easy speed adjustment for blades.
- Easy stop point adjustment for end milling by rotary revolver system.
- Very high safety protection by upper side cover.
- Anti-Fracture protection on profile by speed adjustment during end milling process.
- Easy blade change system by plug&play blade changer.
- Machine adjust axis way according to profile count automatically.
- Onboard toolbox and safe box for spare blades.
- High quality and precision on end milling process by double clammer on side clamp system.
- This system also prevents sliding of profiles and miter joint problems.
- Support arms provide balanced end milling process for profiles up to 2.5 mt.
- Machine can process from 1 to 6 profiles at the same time.



Optional

- Cooling system for Aluminium profiles (CA 944)
- Hydro-pneumatic system for Aluminium profiles (HP 943)




Technical Specifications

Power Supply	: 400 V, 3 Ph, 50-60 Hz
Power Output	: 1,1 kw, 2.75A
Spindle Speed	: 3.000 r.p.m.
Max. Blade Diameter	: 0160 mm
Max. Routing Height	: 90mm
Max. Routing Dept.	: 30mm
Max. Profile Width	: 120 mm
Max. Profile Height	: 90mm
Air Pressure	: 6-8 bar
Air Consumption	: 20 lt. /min.
Machine Height	: 1.240 mm
Machine Length	: 1.070 mm
Machine Width	: 860 mm
Machine Weight	: 125 kg

Technical Specifications

Power Supply	: 400 V, 3 Ph, 50-60 Hz
Total Power	: 1,65 kw (1,1kw +0,55 kw)
Air Pressure	: 6-8 bar
Air Consumption	: 50 lt./ min.
Max. Profile Width	: 120 mm
Max. Profile Height	: 90mm
Max.Blade Diameter	: 130 mm
Max. Endmilling Height	: 90mm
Max. Endmilling	: 30mm
Depth Machine Height	: 1.640 mm
Machine Lenght	: 1.600 mm
Machine Width	: 700 mm (With Support Table 1.460 mm)
Machine Weight	: 350 kg

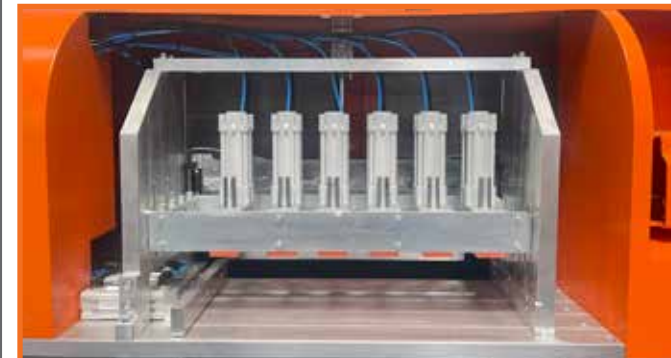

schtec Corner Crimping Machines




CP 290
Corner Crimping Machine

- Joins Aluminium profiles corners by pressing them together.
- Hidropneumatic high pressure power system. (easy maintenance)
- Ability to work with different profiles sizes.
- Small frames can be joined by specially designed clamping unit.
- Quick blade changing system.
- The front set square system is designed for easy profile loading and unloading.
- Pressing process is done step by step with a foot pedal.
- Support arms are included as standard.

Optional

- Max .Profile Height can be increased up to 300 mm

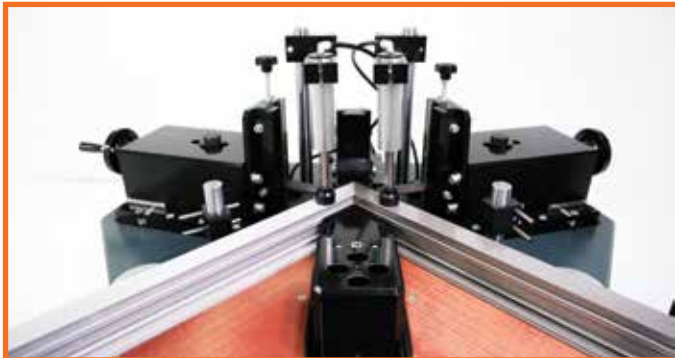

Technical Specifications

Power Supply	: 220 V, 1 Ph, 50-60 Hz
Power Output	: 2.2 kW, 5.5 A
Side Cylinder Pressing Power	: 7 ton/cm ²
Upper Cylinder Pressing Power	: 3 ton/cm ²
Air Pressure	: 6-8 bar
Air Consumption	: 60 lt. / min.
Max .Profile Height	: 220 mm
Max. Knives Pressing Height	: 190 mm
Min. Frame Size	: 350 mm X 350 mm
Machine Height	: 1.300 mm
Machine Length	: 900 mm (1.760 mm with support arms)
Machine Width	: 1.200 mm (2.525 mm with support arms)
Machine Weight	: 575 kg

schtec Corner Crimping Machine




ACP 295
Automatic Servo-Controlled Corner Press for Aluminum

- The machine performs servo-controlled corner pressing operations for aluminum profiles.
- High productivity and precision ensured by 14 high-accuracy axes controlled by servo motors.
- Pressing blades are independently driven by servo motors and can move forward/backward, left/right, and up/down. The appropriate pressing program for each profile type is stored in the machine memory.
- Pre-centering system with servo-driven movements up/down and forward/backward.
- Equipped with a high-pressure-resistant steel worktable.
- Easy adjustment of pressing blade distances according to the profile type.
- Automatic profile centering via precision squares.The vertical movement of the centering square allows easy rotation of the profile.
- Capable of pressing wide and high profiles.
- Low power consumption thanks to intelligent control technology.
- DC link on axis drives for enhanced energy efficiency.
- Uninterruptible Power Supply (UPS).
- 15" touch screen and a high-performance industrial PC with Windows 10 Embedded, fanless operation between 0°C and 55°C.
- Industrial PC-based control system (Beckhoff).
- Compatible with IoT & Industry 4.0.
- User-friendly interface, online diagnostics and fault detection for I/O and pneumatic systems via BUS control.
- Ability to upload job files via USB or Network and remote access to the machine.
- Centralized lubrication system for easy machine maintenance.
- Fast and efficient service support via remote online connection.

Optional


- Set of pressing blades for different profile types

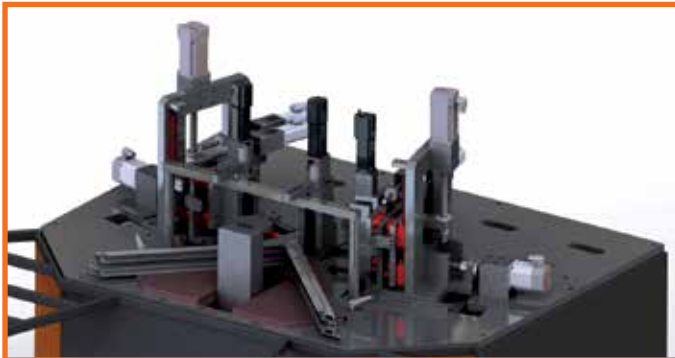

Technical Specifications

Power supply	: 400 V, 3 phases, 50–60 Hz
Total installed power	: 8 kW, 20 A
Maximum profile height	: 255 mm
Minimum profile height	: 20 mm
Maximum profile width	: 155 mm
Minimum profile width	: 20 mm
Maximum pressing blade stroke	: 120 mm
Minimum pressing blade stroke	: 15 mm
Compressed air pressure	: 7 bar
Air consumption	: 150 l/min
Machine height	: 1,930 mm
Machine length	: 2,750 mm
Machine width	: 2,420 mm
Machine weight	: 1,480 kg

schtec Aluminium Profile Machining and Cutting Center

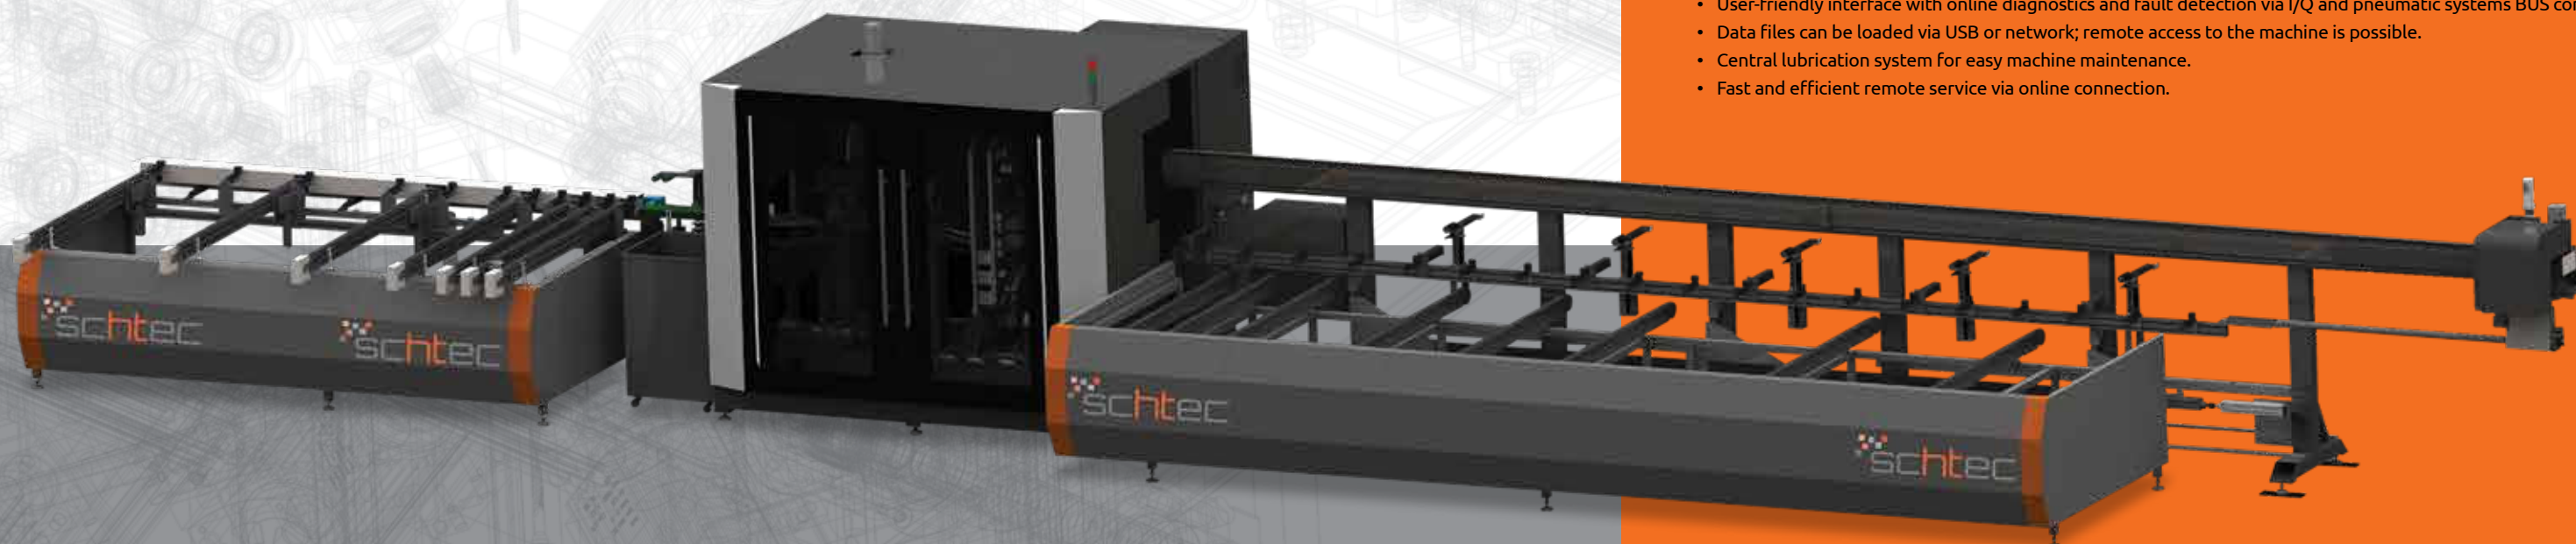

SMC 330-AL Aluminium Profile Machining and Cutting Center


- All drilling, milling, marking, and cutting operations on aluminum profiles are performed under computer control.
- High precision axes controlled by servo motors enable top-level efficiency.
- Capacity to load 11 profiles, with the ability to handle profiles up to 6.5 meters in length.
- Ø600mm vertical saw performs servo motor-controlled automatic cutting at all angles between 30°–150° with 0.1° accuracy.
- Servo-controlled gripper capable of rotating 0° / 90°.
- Ability to perform milling, drilling, and angled water drainage channel operations.
- Milling station equipped with 13 tools to carry out all operations precisely.
- Servo-controlled 3-angle tool enables working at intermediate angles.
- Servo-controlled pressing unit at the saw output station.
- High-performance cutting fluid cooling system arranged for use during profile processing.
- Low power consumption thanks to intelligent control technology.
- DC connection on axis drives for higher energy efficiency.
- Uninterruptible Power Supply (UPS).
- 15" touchscreen with Windows 10 Embedded operating system; industrial PC operates fanless between 0°C - 55°C with high performance.
- Industrial PC-based control system (Beckhoff).
- IOT & Industry 4.0 compatible operation.
- User-friendly interface with online diagnostics and fault detection via I/Q and pneumatic systems BUS control.
- Data files can be loaded via USB or network; remote access to the machine is possible.
- Central lubrication system for easy machine maintenance.
- Fast and efficient remote service via online connection.

Technical Specifications:

Voltage	: 400 V, 3 Phase, 50–60 Hz
Power Consumption	: 14,4 kW, 36 A
Spindle Speed	: 24,000 rpm
Saw Blade Diameter	: 600 mm
Saw Blade Motor Power	: 2,2kw
Spindle Power	: 1,6 kW, S6
Collet Type	: ER 25, ER 25 mini
Maximum Tool Count	: 14
Minimum Profile Machining Height	: 30 mm
Maximum Profile Machining Height	: 160 mm
Maximum Profile Machining Width	: 130 mm
Minimum Profile Machining Length	: 350 mm
Maximum Profile Machining Length	: 4000 mm (Available on request)
Minimum Raw Profile Length	: 1000 mm
Max Profile Length	: 6,500 mm
Air Pressure	: 6 -8 bar
Air Consumption	: 1,250 l/min
Machine Height	: 2,480 mm
Machine Length	: 16,670 mm
Machine Width	: 3,420 mm
Machine Weight	: 5,530 kg



schtec Aluminium Profile Machining and Cutting Center

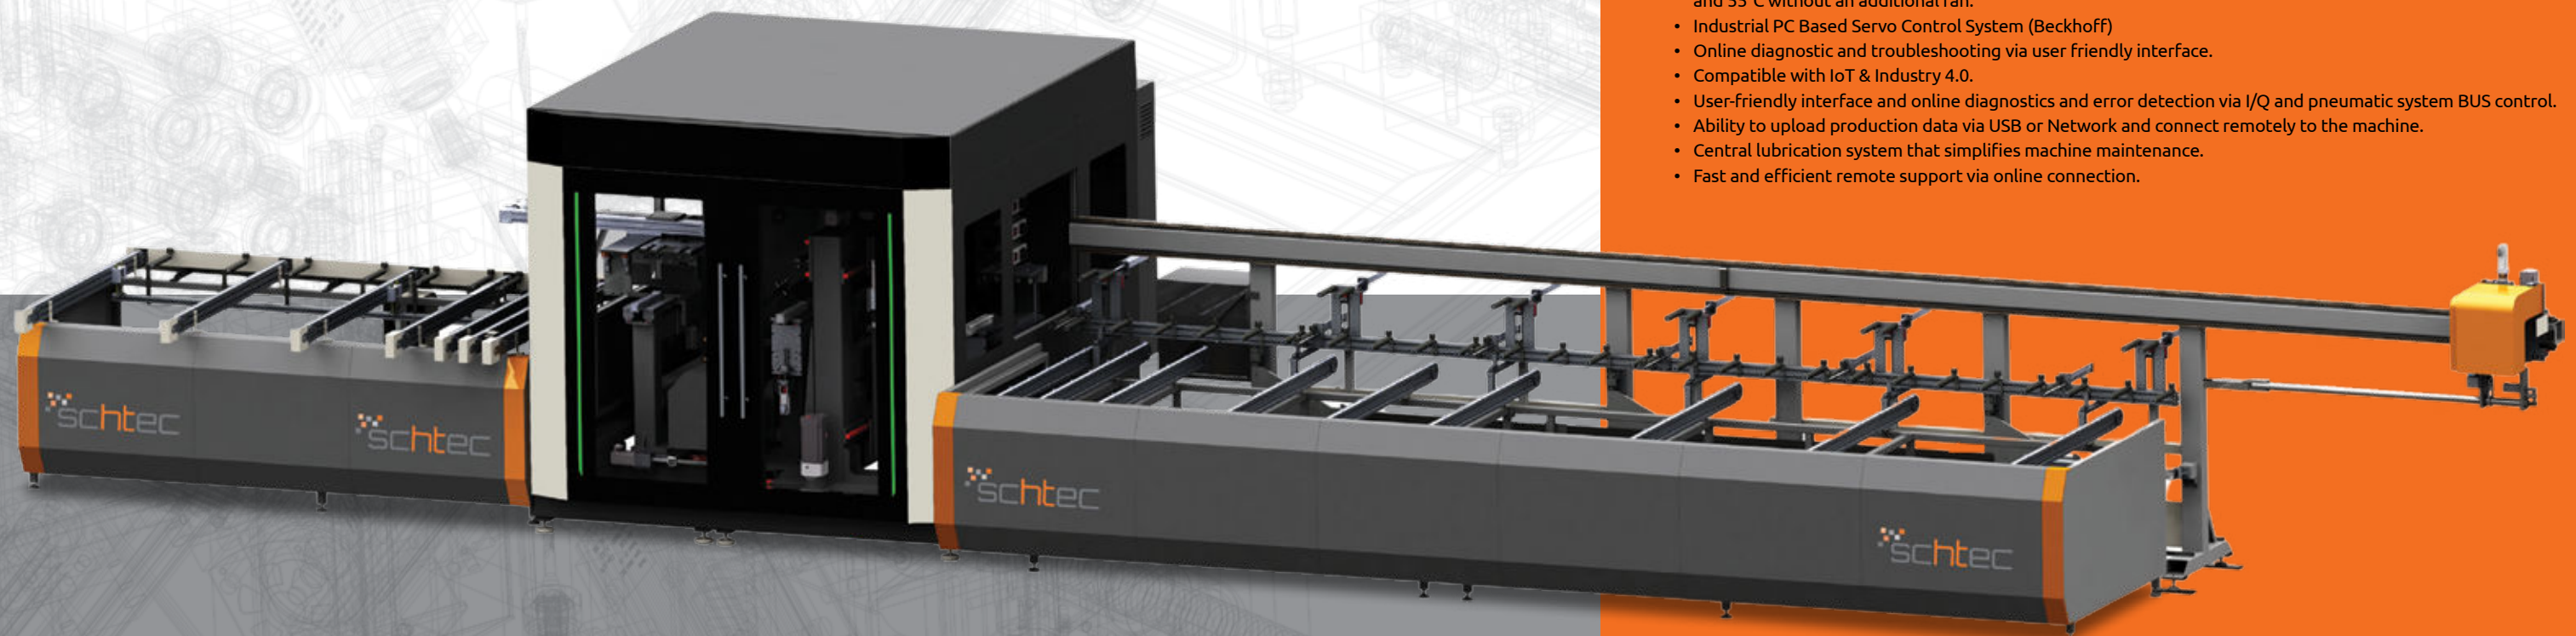

MCALS 650

Aluminium Profile Machining and Cutting Center

- All drilling, notching, milling, marking and cutting operations on the aluminum profiles are carried out under computer control.
- Operates with high efficiency with 26 high-precision axes controlled servo motors,
- Capacity for loading 6 profiles, capable of loading profiles up to 7 meters in length.
- Automatic cutting with 0.1° precision using a Ø600mm vertical saw, servo motor controlled.
- Automatic cutting with 0.1° precision using a Ø400mm horizontal saw, servo motor controlled.
- Servo-controlled gripper that can rotate 0° to 90°.
- Capability to perform milling, drilling, and angled drainage channel operations.
- Waste collection conveyor and waste bin inside the machine.
- Beckhoff PC control with interpolating axes in two separate groups (Saw-CNC).
- Performs all operations precisely with 16 tools located in the milling group
- Intermediate angle operation capability with a 4-angle servo-controlled tool.
- Height-adjustable servo-controlled clamp units in the Saw and Milling groups.
- Electronic horizontal and vertical clamp control in the saw group.
- High-performance coolant system arranged for use during profile processing.
- Low power consumption enabled by smart control technology.
- DC connection in axis drives for greater energy efficiency.
- Uninterruptible Power Supply (UPS).
- High-performance industrial PC with a 15" touchscreen, Windows 10 Embedded OS, operates between 0°C and 55°C without an additional fan.
- Industrial PC Based Servo Control System (Beckhoff)
- Online diagnostic and troubleshooting via user friendly interface.
- Compatible with IoT & Industry 4.0.
- User-friendly interface and online diagnostics and error detection via I/Q and pneumatic system BUS control.
- Ability to upload production data via USB or Network and connect remotely to the machine.
- Central lubrication system that simplifies machine maintenance.
- Fast and efficient remote support via online connection.



Technical Specifications:

Voltage	: 400 V, 3 PH, 50-60Hz
Power Consumption	: 40 kW, 100 A
Spindle Speed	: 24,000 rpm
Spindle Power	: 4.5 kW, S6
Collet Type	: ER 25, ER 25 mini
Min. Profile Width	: 35 mm
Maximum Tool Count	: 16 units
Max Profile Height	: 240mm
Max Profile Width	: 300mm
Max Profile Length	: 7000mm
Air Pressure	: 7 bar
Air Consumption	: 3,600 liters/min
Machine Height	: 2780mm
Machine Length	: 16,780mm
Machine Width	: 4,180mm
Machine Weight	: 9,450kg



SMC 305 PVC Profile Processing Center

- All milling, drilling, support sheet screwing and marking on PVC profiles are computer controlled and assembled in one machine.
- It is controlled by two servo motors that act as gantry of the X axis and operations are performed without the movement of the profile.
- Pre-cutted 10 profiles can be stacked. (Max.4 mt.)
- Barcode reading system makes it easy to enter profiles and process sequences.
- It makes water drain slots, drilling and milling operations at predetermined fixed angles.
- Automatic reinforcement screwing.
- Mounting, triple handle and hinge holes are drilled with reinforcement.
- File transfer by USB or ethernet network, remote desktop connection by WiFi or Ethernet connection.
- Central lubrication system reduces the time spent on maintenance.
- With remote connection method, service and connection to all automation systems to detect and solve problems.
- Barcode reader.
- Online diagnostic and troubleshooting via user friendly interface.
- All alarms and machine faults are displayed on HMI along with solutions.
- 15" Touch Screen and high performance industrial PC with Windows XP Embedded system. This system can operate fanless between 0°C and 55°C.
- Industrial PC Based Servo Control System. (Beckhoff)
- Private HMI software developed by Schtec Software Department allows different kinds of window design program data files to be uploaded on this machine.
- Barcode printer.



Technical Specifications:

Power Supply	: 400 V, 3ph, 50-60 Hz
Power Consumption	: 9.8 kW, 24.5 A
Air Pressure	: 6-8 bar
Air Consumption	: 320 lt / min.
Max. Profile Height	: 140 mm
Min. Profile Height	: 45 mm
Max. Profile Width	: 130 mm
Min. Profile Width	: 40 mm
Maximum Milling Length	: 4.000 mm
Minimum Milling Length	: 400 mm
Machine Height	: 2.300 mm
Machine Length	: 11.100 mm
Machine Width	: 3.500 mm
Machine Weight	: 2.900 kg



schtec Profile Machining and Cutting Centers




SMC 308

PVC Profile Processing & Cutting Center

- CNC processing center can do all operations on PVC profiles such as cutting, marking, opening key holes, copy routing for water slot milling, hinge holes, handle holes etc.
- Cutting at fixed angles of 45-90-135 degrees with 0.1 degree precision, with saw diameter of 500 mm at 45-135 degrees, and 550 mm at 90 degrees.
- Milling with 3 high-speed special design air-cooled 0.75 Kw spindles.
- Sizing and milling operations on profile can be performed at the cutting station and milling station.
- With the processed profile, 5 pieces can be loaded on the machine. (Max.length 6.5 m)
- Private HMI software developed by Schtec Software Department allows different kinds of window design program data files to be uploaded on machine.
- All alarms and machine faults are simultaneously displayed on screen along with solutions
- 15" Touch Screen and high performance industrial PC with Windows 10 Embedded system. This system can operate fanless between 0°C and 55°C.
- Industrial PC Based Servo Control System (Beckhoff)
- Online diagnostic and troubleshooting via user friendly interface.
- File transfer by USB or network and remote desktop connection.
- Central lubrication system reduces the time spent for maintenance.
- With the sawdust collecting pan, the burrs from the cutting are removed.

Technical Specifications:

Voltage	: 400 V, 3 ph, 50-60 Hz
Power Consumption	: 8 kW, 20A
Max. Profile Processing Height	: 200 mm
Min. Profile Processing Height	: 40 mm
Max. Profile Processing Width	: 135 mm
Max. Profile Processing Width	: 35 mm
Max. Profile Bar Length	: 6.500 mm
Max. Processing Length for Profile	: 6.000 mm
Max. Cutting Length	: 3.500 mm (can be increased under necessary conditions)
Min. Cutting Length	: 400 mm
Min. Processing Length for Profile	: 1.200 mm
Tool Diameter	: 5 mm Carbide Fast Tool x 2 / 13mm Carbide Fast Tool x 1
Tool RPM	: 12.000 rpm
Max. Axes Speed (Processing)	: 35 m. / min.
Max. Axes Speed (Ring)	: 30 ° / s.
Max. Axes Speed (Carrier)	: 30 m. / dak.
Air Pressure	: 6-8 bar
Air Consumption	: 450 lt. /dak.
Machine Height	: 2,180 mm
Machine Length	: 15,140 mm
Machine Width	: 3,030 mm
Machine Weight	: 3,860 Kg
Standart Tool Count	: 3 piece high speed air cooling spindles 0,75 Kw

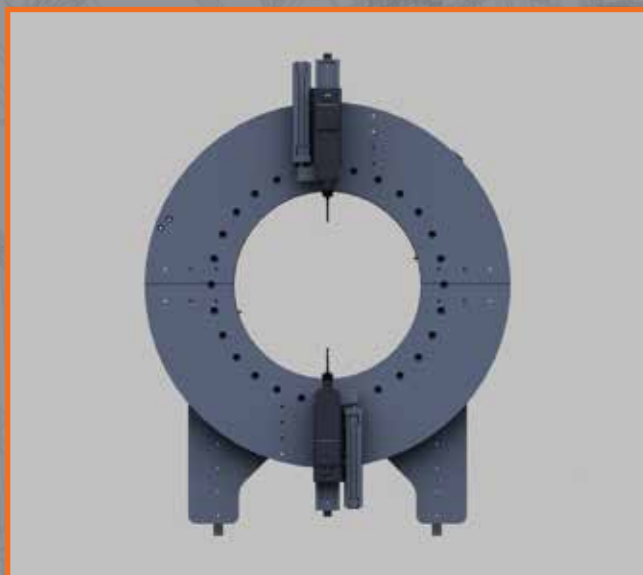

schtec Profile Machining and Cutting Centers



SMC 310

PVC Profile Processing & Cutting Center

- This 3 axis controlled CNC processing center can do all operations on PVC profiles such as cutting, marking, opening key holes, copy routing for water slot milling, hinge holes, handle holes etc.
- All angles between 30 - 150 degrees are cut with 0.1 degree accuracy servo axis controlled 500 mm diameter saw.
- Routing and cutting processes are synchronized to run at the same time.
- With the processed profile, 8 pieces can be loaded on the machine. (Max.length 6.5 m)
- Private HMI software developed by Schtec Software Department allows different kinds of window design program data files to be uploaded on machine.
- Optimisation option can be enabled for each projects separately therefore machine make optimisation for waste profiles automatically.
- All alarms and machine faults are displayed on HMI along with solutions.
- 15" Touch Screen and high performance industrial PC with Windows XP Embedded system. This system can operate fanless between 0°C and 55°C.
- Industrial PC Based Servo Control System. (Beckhoff)
- Online diagnostic and troubleshooting via user friendly interface.
- File transfer by USB or ethernet network.
- Remote desktop connection by WiFi or Ethernet connection.
- Central lubrication system reduces the time spent for maintenance.
- Automatic dust collection system sucks out all pvc dusts and removes wastes fast with 2 different carriers.

Optional

- Optional screwing station having two screw units allows simultaneous screwing of reinforcement steel via servo controlled axes system.
- For operations which can be done on profiles with a height greater than 120 mm and maximum cutting height, please inquire to us.

Technical Specifications:

Voltage	: 400 V, 3 PH, 50-60Hz
Power Consumption	: 9.8 kW, 24.SA
Max. Profile Height	: 120 mm
Min. Profile Height	: 40mm
Max. Profile Width	: 130 mm
Min. Profile Width	: 35mm
Max. Profile Bar Length	: 6.500 mm
Max. Processing Length	: 6.000 mm
Maximum Cutting Length	: 3.000 mm (can be increased when it needs)
Minimum Cutting Length	: 370 mm
Minimum Process Length for Profile	: 1200 mm
Tool Diameter	: 6 mm Carbide Fast Tool
Tool rpm	: 18.000 rpm
Max. Axis Speed (Processing)	: 50 m./min
Max. Axis Speed (Saw)	: 100 °/sec
Max. Axis Speed (Carrier)	: 40 m./min
Air Pressure	: 6-8 Bar
Air Consumption	: 650 lt./ min.
Machine Height	: 2.178 mm
Machine Width	: 2.860 mm
Machine Length	: 13.325 mm
Machine Weight	: 3.500 kg
Standard Tool Count	: 6 piece high speed air cooling spindles




Schtec Profile Machining and Cutting Centers



Optional

- Optional screwing station having two screw units allows simultaneous screwing of reinforcement steel and drilling of triple holes for handles via servo controlled axes system.
- For operations which can be done on profiles with a height greater than 120 mm and maximum cutting height, please inquire to use to us.

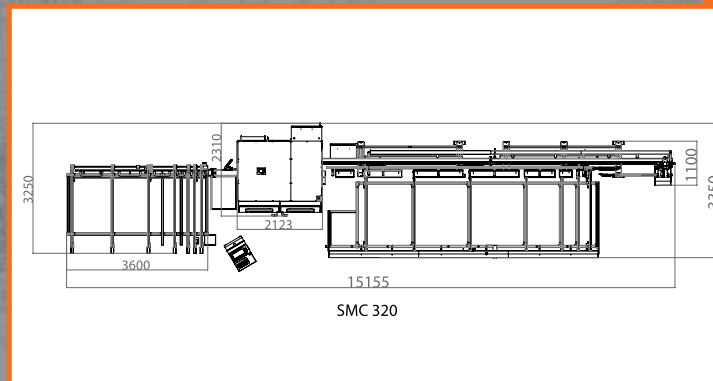


SMC 320

PVC Profile Processing & Cutting Center


- This 3 axis controlled CNC processing center can do all operations on PVC profiles such as cutting, marking, opening key holes, copy routing for water slot milling, hinge holes, handle holes etc.
- All angles between 30 - 150 degrees are cut with 0.1 degree accuracy servo axis controlled 500 mm diameter saw.
- Routing and cutting processes are synchronized to run at the same time.
- Saves time by simultaneously opening multiple holes on door profiles, such as door handles, slots by the axis control system on its router unit.
- With the processed profile, 11 pieces can be loaded on the machine. (Max.length 6.5 m)
- New design of loading station allow profiles to be loaded simultaneously. This feature saves time from loading process.
- Private HMI software developed by Schtec Software Department allows different kinds of window design program data files to be uploaded on machine.
- All alarms and machine faults are displayed on HMI along with solutions.
- 15" Touch Screen and high performance industrial PC with Windows XP Embedded system. This system can operate fanless between 0°C and 55°C.
- Industrial PC Based Servo Control System. (Beckhoff)
- Online diagnostic and troubleshooting via user friendly interface.
- File transfer by USB or ethernet network.
- Remote desktop connection by WiFi or Ethernet connection.
- Central lubrication system reduces the time spent for maintenance.
- Automatic dust collection system sucks out all pvc dusts and removes wastes fast with 2 different carriers.
- Optimisation option can be enabled for each projects separately therefore machine make optimisation for waste profiles automatically.

Technical Specifications:

Voltage	: 400 V, 3 PH, 50-60Hz
Power Consumption	: 10.8 kW, 27 A
Max. Profile Height	: 130 mm (up to 170 mm only cutting process)
Min. Profile Height	: 40mm
Max. Profile Width	: 130mm
Min. Profile Width	: 35 mm
Max. Profile Bar Length	: 6.500 mm
Max.Process Length for Profile	: 6.000 mm
Maximum Cutting Length	: 3.000 mm (can be increased when it needs)
Minimum Cutting Length	: 370 mm
Minimum Process Length for Profile	: 900 mm
Tool Diameter	: 6 mm Carbide Fast Tool
Tool rpm	: 18.000 rpm
Max. Axis Speed (Processing)	: 50 m/min
Max. Axis Speed (Saw)	: 100 °/sec
Max. Axis Speed (Carrier)	: 40 m/min
Air Pressure	: 6-8 Bar
Air Consumption	: 950 lt/min
Machine Height	: 2.200 mm
Machine Width	: 3.450 mm
Machine Weight	: 3.750 kg
Machine Length	: 15.500 mm
Standart Tool Count	: 7 piece high speed air cooling spindles



Schtec Profile Machining and Cutting Centers

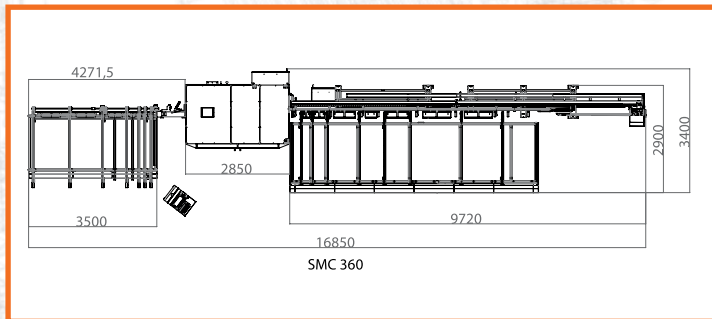

SMC 360

PVC Profile Processing & Cutting Center

- This 2 separately controlled CNC processing unit can do all operations with 14 tools on PVC profiles such as cutting, marking, opening key holes, copy routing for water slot milling, hinge holes, handle holes etc.
- All angles between 30 - 150 degrees are cut with 0.1 degree accuracy servo axis controlled 500 mm diameter saw.
- Servo controlled and capable of automatic positioning according to profile height axis on saw blade by way of this advance fast and rigid cutting.
- Saves time by simultaneously opening multiple holes on door profiles, such as door handles, slots by the axis control system on 2 separately router units.
- With the processed profile, 11 pieces can be loaded on the machine. (Max. length 6.5 m)
- Precision magnetic encoders used to minimize user errors and profile width and height, are checked and processed.
- New design of loading station allow profiles to be loaded simultaneously. This feature saves time from loading process.
- Private HMI software, developed by Schtec Software Department, allows different kinds of window design program data files to be uploaded on machine.
- Simultaneous optimization on the machine allows the machine to optimize itself on the waste profiles.
- All alarms and machine faults are displayed on HMI along with solutions.
- 15" Touch Screen and high performance industrial PC with Windows XP Embedded system. This system can operate fanless between 0°C and 55°C.
- Industrial PC Based Servo Control System. (Beckhoff)
- Online diagnostic and troubleshooting via user friendly interface.
- File transfer by USB or ethernet network and remote desktop connection by Wi-Fi or Ethernet connection.
- Central lubrication system reduces the time spent on maintenance.
- Automatic dust collection system sucks out all pvc dusts and removes the wastes fast with 2 different carriers.

Optional


- Optional screwing station, has two screw units, allows simultaneous screwing of reinforcement steel via servo controlled axes system.
- For operations, which can be done on profiles with a height greater than 120 mm and maximum cutting height, please inquire to us.

Technical Specifications:

Voltage	: 400 V, 3 PH, 50-60Hz
Power Consumption	: 12 kW, 30 A
Max. Profile Height	: 130 mm (up to 170 mm only cutting process)
Min. Profile Height	: 40 mm
Max. Profile Width	: 130 mm
Min. Profile Width	: 35 mm
Max. Profile Bar Length	: 6.500 mm
Max. Process Length for Profile	: 6.000 mm
Maximum Cutting Length	: 3.500 mm (can be increased when it needs)
Minimum Cutting Length	: 370 mm
Min. Process Length for Profile	: 900 mm
Tool Diameter	: 6 mm / 10 mm / 13 mm Carbide Fast Tool
Tool rpm	: 18.000 rpm
Max. Axis Speed (Processing)	: 50 m./min.
Max. Axis Speed (Saw)	: 100°/sec.
Max. Axis Speed (Carrier)	: 40 m./min.
Air Pressure	: 6-8 Bar
Air Consumption	: 1075 lt./min.
Machine Height	: 2.165 mm
Machine Length	: 16.370 mm
Machine Width	: 3.206 mm
Machine Weight	: 4.500 kg
Standart Tool Count	: 11 piece high speed air cooling spindles




"where quality and technology combine with experience"

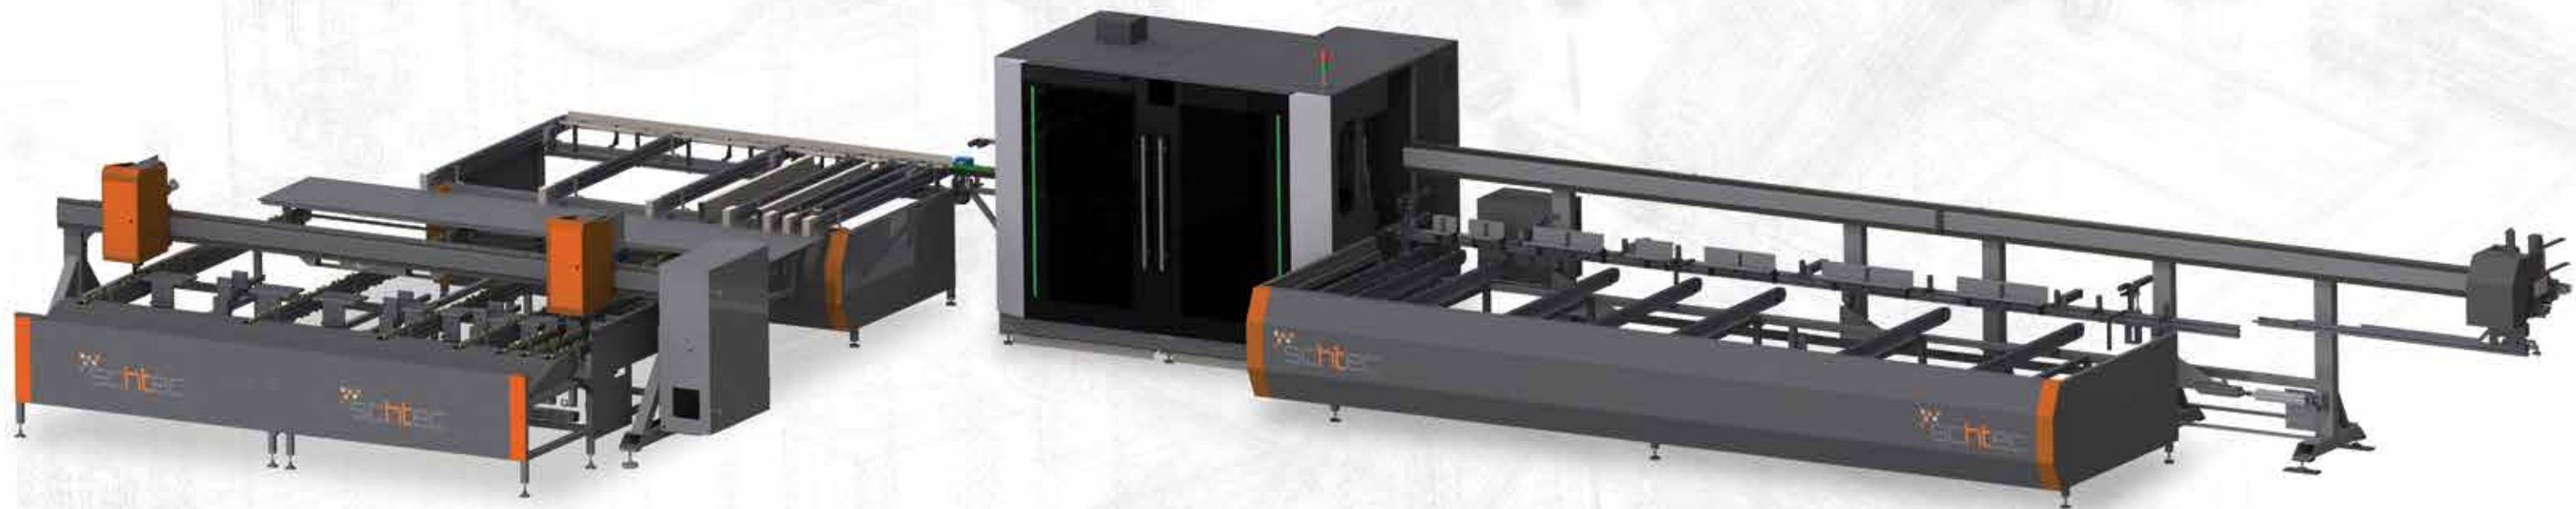

 schtec

schtec Profile Machining and Cutting Centers



SVMC 120


Profile Machining and Cutting Center (3 Cutting Saw – V Type)

- Infeed magazine, 11 pieces can be loaded on the machine. (Max. length 6.5 m)
- Simultaneous optimization on the machine allows the machine to self-optimize on the waste profiles, this can be switch between
- FDS control and machine control.
- Height and width detection to ensure correct profile is loaded.
- New design of loading station allows profiles to be loaded simultaneously, this feature increase the efficiency of profile changeovers.
- The 4-axis routing portal comprises of 11 high speed routing motors utilising 5mm & 8mm cutters at 0, 90, 180 & 270 degrees plus 3, servo-driven angle router motors with 5mm cutters for multiple profile suites with different rebate drainage angles.
- This allows the SVMC120 to produce all preps in PVC profiles such as drainage, spot marking, euro-cylinder holes, night vents, hinge holes, handle holes, euro groove routing etc.
- Highly efficient simultaneous routing operations on 4-axis routing portal, allowing machining from the top and bottom concurrently for door handles and night vents etc.
- All angles between 30 - 150 degrees are cut with 0.1 degree accuracy with servo axis controlled 500 mm diameter saw.
- Newly designed double clamping system to stabilise both the bevel and rebate with individual clamps and profile specific software controlled variable clamping pressures on each of the 4 sawing clamps.
- Software controlled transom support for Z & T profiles
- Private HMI software developed by Schtec Software Department allows different kinds of window design program data files to be uploaded on machine, fully compatible with established UK software BM and First Degree.
- All alarms and machine faults are displayed on HMI along with solutions.
- 15" Touch Screen and high-performance industrial PC with Windows Embedded system.
- Industrial PC Based Servo Control System (Beckhoff)
- Online diagnostic and troubleshooting via user friendly interface.
- File transfer by USB or ethernet network and remote desktop connection by Wi-Fi or Ethernet connection
- Central lubrication system reduces the time spent for maintenance.
- Scrap conveyor under saw and extraction ports on all saw blade cowl.
- Capacity 100-110 frames per 8 hour shift depending on complexity (timings based on 14 piece top over fixed next to a side light) Approximately 1 piece every 18.6 seconds.

Technical Specifications:

Voltage	: 400 V, 3 PH, 50-60Hz	Scrap length in frontal basket waste	: > 400 mm
Power Consumption	: 13.6 kW, 34 A (Max Consumption)	Shorter cutting length discharged on unloading	: >320 mm (*)
Average Power Consumption	: 10.4 kW, 26 A	Longer cutting length discharged on loading	: > 4.000 mm (*)
Max. Profile Height	: 160 mm	Tool Count	: 11 high-speed air-cooling spindles
Max. Profile Height (V)	: 82 mm	Saw Diameter	: D= 500 mm d=30mm (Main Saw)
Min. Profile Height	: 40 mm	Saw Diameter (V Notch)	: D= 300 mm d=30mm (x2)
Max. Profile Width	: 130 mm	Max Tool rpm	: 18.000 rpm
Max. Profile Width (V)	: 125 mm	Max. Axes Speed (Processing)	: 50 m/min
Min. Profile Width	: 35 mm	Max. Axes Speed (Saw)	: 100 °/sec
Min. Cutting Depth (V)	: 15 mm	Max. Axes Speed (Carrier)	: 40 m/min
Max. Profile Bar Length	: 6.500 mm	Air Pressure	: 6-7 Bar
Max. Process Length for Profile	: 6.000 mm	Air Consumption	: 1480lt /min
Maximum Cutting Length	: 3.500 mm (can be increased when it needs)	Machine Height	: 2.200 mm
Minimum Cutting Length	: 320 mm	Machine Width	: 3.450 mm
Min. Process Length for Profile	: 600 mm	Machine Weight	: 5.350 kg
Shorter scrap into rear waste basket	: 275 mm	Machine Length	: 16.800 mm

schtec Profile Machining and Cutting Centers

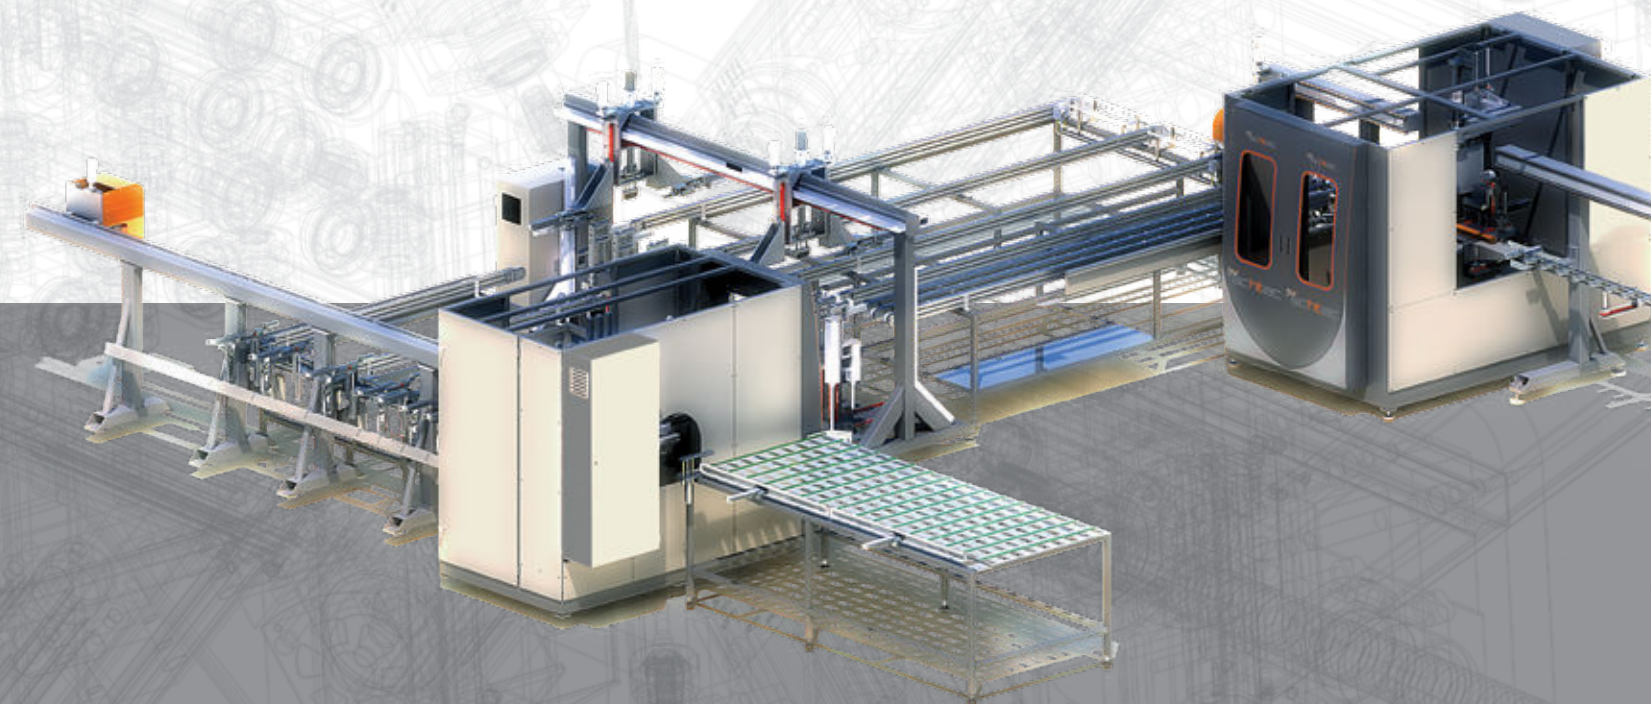


CSML 240 Fully Automated Processing Center

- All gripper stations on the machine are with high-speed Linear Axis control.
- Gripper axis is equipped with 90 degrees rotating axis in order to minimize the issues in gripping of different types of profiles.
- All channel, drilling, marking, barrel and door handle hole processes on PVC profiles are done without reinforcement metal by CNC controlled 11 tools on high precision L designed 2 separate tool rings.
- In processing station without reinforcement steel two separate L groups are controlled totally by 6 CNC axes.
- While reaching each and every spot on profile, pressing groups are also controlled by 2 different axes for profile fixing.
- 10 tools are used in processes with reinforcement steel. All processes on PVC profiles are done by totally 21 tools with high precision.
- All tools on processing stations can be set at 4 different speeds according to the type of process.
- Cutting of all angles between 45 - 135 degrees with 0.1 degree precision with servo axis controlled 2 pcs. 550 mm and 1 pc. 600 mm diameter blades.
- Fast and rigid cutting with servo axis controlled blade axis that is capable of automatic positioning according to profile height.
- Minimum processing time on door profiles with Milling Unit with reinforcement steel.
- Total profile loading capacity 10 + 2 bars with profile elevator system on loading station: (10 pcs. on the loading table, 1 pc. on the elevator and 1 pc. in running process) (max. 6.5 meters Length)
- Incorrect profile loading is prevented by controlling of profile width and length values with precise magnetic encoders that is used to minimize user errors.
- All time losses arising from loading time are minimized with elevator systems on loading stations and with independent movement of profile loading stations.
- Cutting and processing of special type of profiles belonging to French, Dutch and English window systems.
- V, Arrow Head and Reverse Butt cutting.
- Cut pieces are swiftly transferred to next station with linear axis movement unloading station.
- Simultaneous screwing process is done with 2 full automatic 5 servo axis controlled separate screwing units that are capable of duplex screwing.
- Servo controlled tables and screwing unit provide time saving from screwing of profiles with different heights.
- Seamless and full compatible working with all window drawing programs thanks to the special interface developed by Schtec software department.
- Machine can optimize on waste profiles by itself thanks to simultaneous optimization on machine.
- High performance industrial PC with 15" touch screen and Windows 10 Embedded operating system working between 0°C - 55°C without a fan.
- Industrial PC based control system. (Beckhoff)
- User friendly interface and IQ, online diagnostic and troubleshooting through pneumatic systems BUS control.
- Loading of work files through USB and network and remote connection to the machine.
- Central lubrication system that facilitates machine maintenance.
- Barcode printer.

Optional

- Linear Servo System

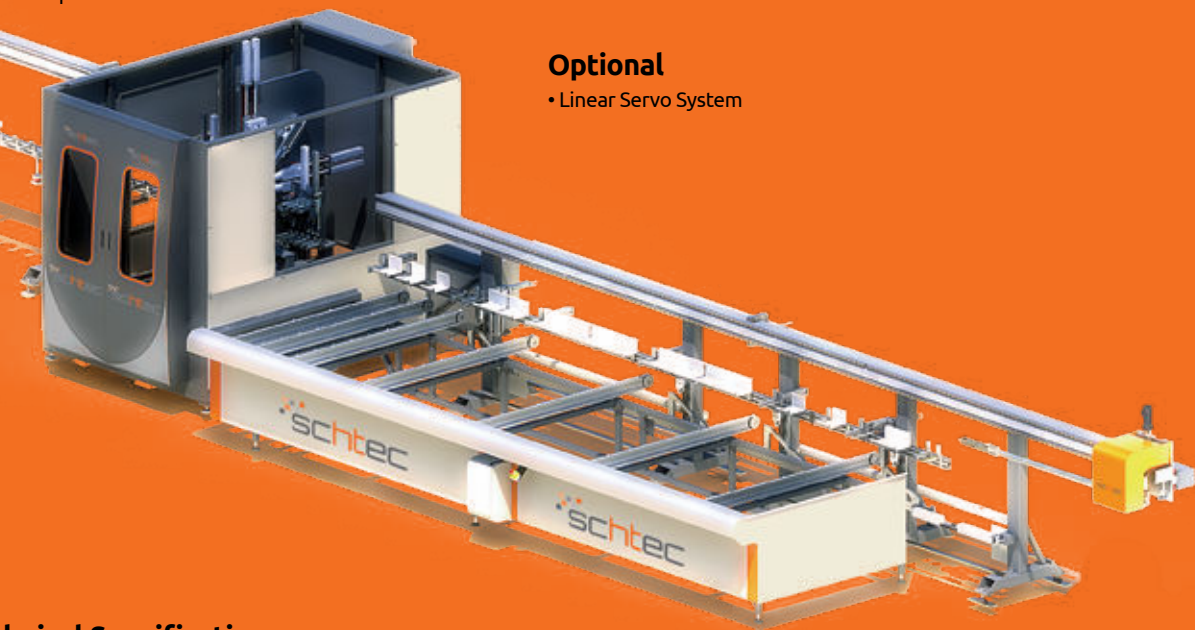

Technical Specifications:

Voltage	: 400 V, 3 Ph, 50-60 Hz	Tool Diameter	: 6 mm / 8mm / 10 mm / 12 mm Carbide Fast Tool (Two different type of diameter can be select for each working surface)
Power Consumption		Tool Rpm	: 900 / 6000 / 12000 / 18000 rpm
Machining Station	: 12 kW / 30 A	Max. Axis Speed (Processing)	: 50 m. / min.
Cutting Station	: 14 kW / 35 A	Max. Axis Speed (Saw)	: 100 ° / sec.
Screwing Station	: 4 kW / 10 A	Max. Axis Speed (Carrier)	: 40 m. / min.
Machining Station with Reinforcement	: 12 kW / 30 A	Air Pressure	: 6-8 bar
Max. Profile Processing Height	: 215 mm	Air Consumption	: 1075 lt. /min
Min. Profile Processing Height	: 40 mm	Machine Height	: 2.300 mm
Max. Profile Processing Width	: 145 mm	Machine Length	: 25.930 mm
Min. Profile Processing Width	: 35 mm	Machine Width	: 10.800 mm
Max. Profile Bar Length	: 6.500 mm	Machine Weight	: 11.000 kg
Max. Process Length for Profile	: 6.000 mm (up to 6.500 mm)	Standart Tool Count	: 21 pieces high speed special design air cooling spindles (4 different RPM can be set for each process separately)
Min. Process Length for Profile	: 700 mm		
Maximum Cutting Length	: 4.500 mm (can be increased up to full bar length)		
Minimum Cutting Length	: 400 mm		

schtec Screwing and Triple Drilling Centers



RS 225

Profile Screwing Center

- Screwing operation process done simultaneously by two separate fully automatic screwing axis controlled units.
- Machine is fully compatible with Processing center in automatic operation.
- Servo controlled automatic positioning with 0.1 mm precision for each screwing position.
- Precision positioning at 0.1 mm accuracy by high-speed servo on the holder axis.
- Up to 8 pieces can be loaded on to the loading station.
- Screwing parameter data bank can be defined by the user for each profile. (up to 10,000 profiles)
- All machine axes are moved by hardened steel ball screw and rack-pinion gear system that provides accuracy and durability.
- Data transfer by via ethernet connection, wireless network connection, USB interface or directly through the barcode reader.
- All error messages and system status information can be observed on the screen by using the HMI software program developed by the Schtec software department.
- Service, trouble shooting and trouble removal can be done by remote connection for the entire system.
- Beckhoff brand, high performance industrial PC operated by Windows XP Embedded system.
- Works between 0°C and 55°C without a fan. 15" touch screen display. (This feature valid when screwing center operates separately from the machining and cutting center)

Optional

- Case Wall Mounting Hole Drill Option (OPT-1)

Technical Specifications:

Power Supply	: 400 V, 3ph, 50-60 Hz
Power Consumption	: 6.8 kW, 17 A
Air Pressure	: 6-8 bar
Air Consumption	: 110 lt./min.
Min. Piece Length	: 400 mm
Max. Piece Length	: 4.500 mm
Max. Profile Height	: 130mm
Min. Profile Height	: 30mm
Max. Profile Width	: 130mm
Machine Height	: 2.850 mm
Machine Length	: 5.695 mm
Machine Width	: 4.540 mm
Machine Weight	: 1.820 kg



schtec Profile Machining and Cutting Centers




RS 235

Fully Automatic Double Screwing and Triple Drilling Center

- Screwing operation process done simultaneously by two separate fully automatic screwing axis controlled units.
- Screwing unit saves time with two stage action for different heights.
- Machine is fully compatible with Processing center in automatic operation.
- Screwing position can be set for each profiles separately.
- Precision positioning at 0.1 mm accuracy by high-speed servo on the holder axis.
- Up to 8 pieces can be loaded on to the loading station.
- Screwing intervals are calculated automatically by the machine for each piece.
- Screwing parameter data bank can be defined by the user for each profile. (up to 10,000 profiles)
- Triple handle drilling process is done with titanium coated drilling bits.
- All machine axis are moved by hardened steel ball screw and rack-pinion gear system that provides accuracy and durability.
- Data transfer by via ethernet connection, wireless network connection, USB interface or directly through the barcode reader.
- All error messages and system status information can be observed on the screen by using the HMI software program developed by the Schtec software department.
- Service, trouble shooting and trouble removal can be done by remote connection for the entire system.
- Beckhoff brand, high performance industrial PC operated by Windows XP Embedded system. Works between 0°C and 55°C without a fan. 15" touch screen display.

Opsiyonlar


- Case Wall Mounting Hole Drill Option (OPT-2)

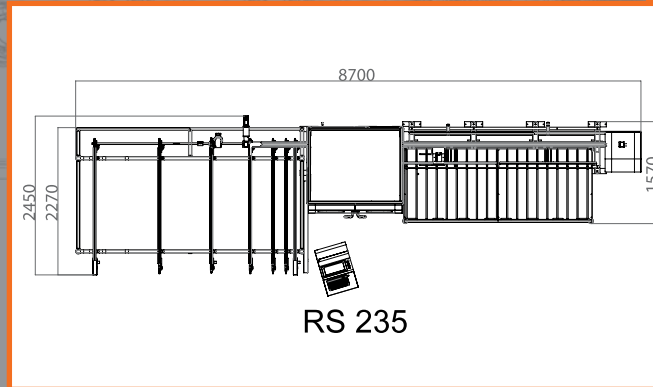

Technical Specifications:

Power Supply	: 400 V, 3ph, 50-60 Hz
Power Consumption	: 5 kW, 12,5 A
Min. Piece Length	: 370 mm
Max. Piece Length	: 3.000 mm (up to 4.500mm with software support)
Max. Profile Height	: 130mm
Min. Profile Height	: 30mm
Max. Profile Width	: 130mm
Air Pressure	: 6-8 bar
Air Consumption	: 110 lt/ min.
Machine Height	: 2.850 mm
Machine Length	: 8.680 mm
Machine Width	: 3.120 mm
Machine Weight	: 1.820 kg





RS 171
 Vertical Reinforcement/
 Steel Screwing Machine



- Pneumatic unit of automatic screw feeding.
- Automatic screwing with pressing hold.
- Automatic stop after screwing process.
- Foot pedal control for flawless screwing.
- Protective switch to prevent faulty use.
- Height adjustment switch for special screws.
- Automatic compression of profile during screwing.
- Adjustable range stops supporting profile.
- Durable use of bit and easy change possibility.
- Setting the torque regarding to the type of screw.
- Average screwing speed 1.5 sec./pc.



Technical Specifications:

Air Pressure	: 6-8 bar
Air Consumption	: 16 lt. / min.
Max.Profile Width	: 130 mm
Min.Profile Width	: 15 mm
Machine Height	: 2.000 mm
Machine Lenght	: 500 mm (with conveyor 2.230 mm)
Machine Width	: 610 mm
Machine Weight	: 150 kg



RS 172
 Double Head Vertical
 Reinforcement Screwing Machine



- Automatic screwing of mullion connectors used on different series and sizes of PVC mullion profiles in one time from both sides positioning with settings.
- Possibility to use 4 types of connector in the same time without change settings.
- Automatic screwing with double side automatic screw feeding unit.
- Automatic clamp and profile centering system.
- Possibility for easy setting and position change.
- Connector joining speed 5.5 sec./pc.



Technical Specifications:

Air Pressure	: 6-8 bar
Air Consumption	: 75 lt. / min.
Machine Height	: 1.560 mm
Machine Lenght	: 1.550 mm
Machine Width	: 915 mm
Machine Weight	: 185 kg



RS 173
Reinforcement Screwing and
Mounting Hole Drilling Machine

- Pneumatic screw feeding unit.
- Mounting hole drilling on the first head; screwing operation on the second head.
- Automatic stop after the screwing process.
- Foot pedal control for flawless screwing.
- Safety switch to prevent faulty operation.
- Special height adjustment switch for different screw lengths.
- Automatic profile clamping during screwing.
- Adjustable range stop with profile support.
- Long-lasting bit usage and easy replacement.
- Adjustable torque according to screw type.
- Average screwing speed: 1.5 sec/piece.




Technical Specifications

Motor Power	: 5 kW
Voltage	: 220 V, 1 Ph, 50-60 Hz
Air Pressure	: 6-8 bar
Air Consumption	: 16 lt./min
Max. Profile Width	: 130 mm
Min. Profile Width	: 15 mm
Machine Height	: 2,000 mm
Machine Length	: 500 mm (2,230 mm with conveyor)
Machine Width	: 610 mm
Machine Weight	: 150 kg



RT 176
Automatic Mullion Connector
Screwing Machine

- Automatic screwing of mullion connectors used on different series and sizes of PVC mullion profiles in one time from both sides positioning with settings.
- Possibility to use 4 types of connector in the same time without change settings.
- Automatic screwing with double side automatic screw feeding unit.
- Automatic clamp and profile centering system.
- Possibility for easy setting and position change.
- Connector joining speed 5.5 sec./pc.

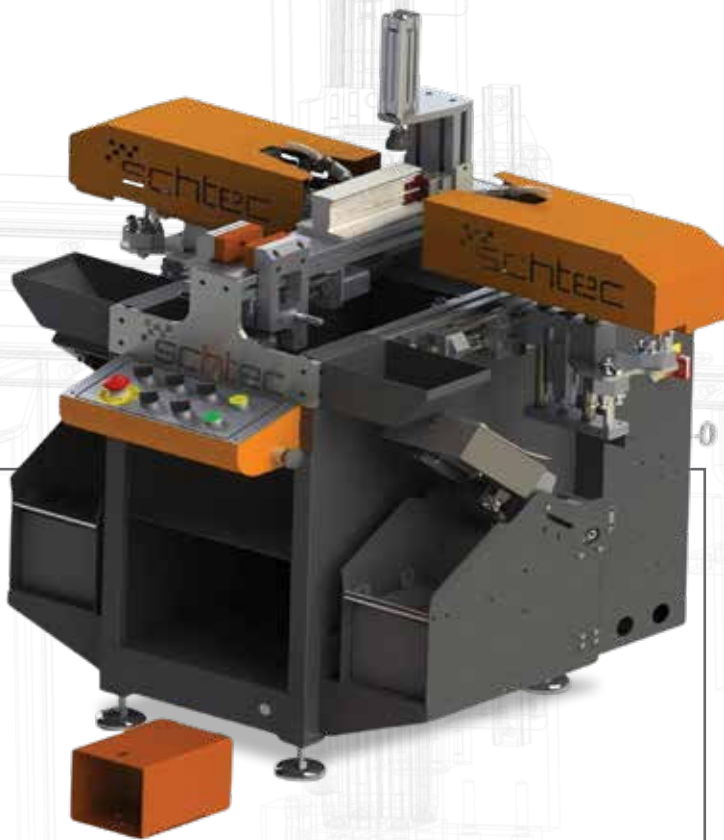

Technical Specifications


Air Pressure	: 6-8 bar
Air Consumption	: 75 lt./min.
Machine Height	: 1.560 mm
Machine Length	: 1.550 mm
Machine Width	: 915 mm
Machine Weight	: 185 kg







WD 710
Single Head Welding Machine

- Precision welding at variable angles between 30-180 degrees of PVC profiles.
- Has the ability to weld with maximum strength.
- 0,2 mm welding seam restriction for both colored and white profiles.
- Melting and combining times can be set digitally.
- Digital touchscreen display to control all operation.
- Heating temperature and time parameters can be adjusted individually.
- Homegenous heating with special heating plates.
- More efficient and long lasting teflon thanks to special teflon system on the heating plates.
- Specially designed mould system to gain time.
- With support arms easy welding on big frames.

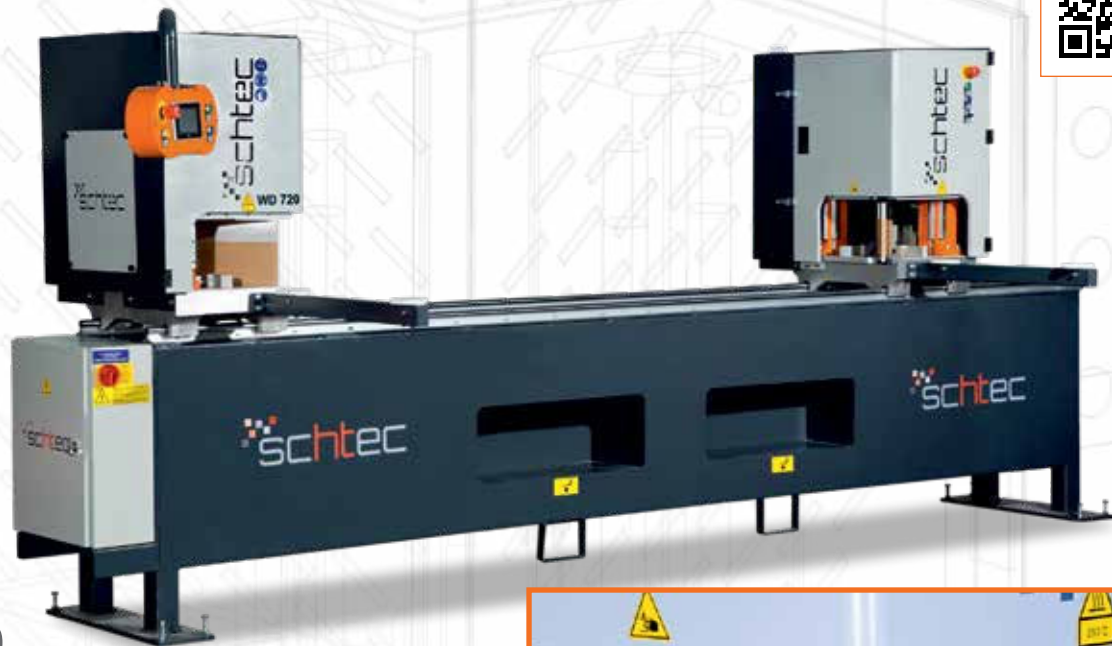

WD 720
Double Head Welding Machine

- High precision welding of two corners of PVC profiles in a single operation.
- Precision welding at variable angles between 60° - 180°.
- Capable of single head welding operation when needed.
- 0,2 mm welding seam restriction for both coloured and white profiles.
- Manual positioning of the movable head and pneumatic brakes.
- Heating, temperature and time parameters can be adjusted individually.
- Digital touch screen display to control all operations.
- Homogenous heating with special heating plates.
- Easy heater plates cleaning system during maintenance.
- More efficient and long lasting teflon due to special teflon system on the heating plates.
- Specially designed mould system to save time.

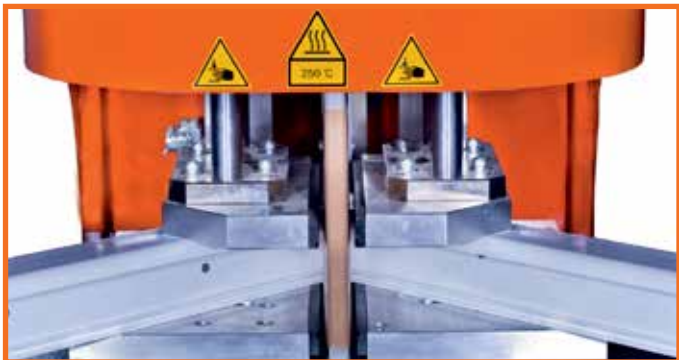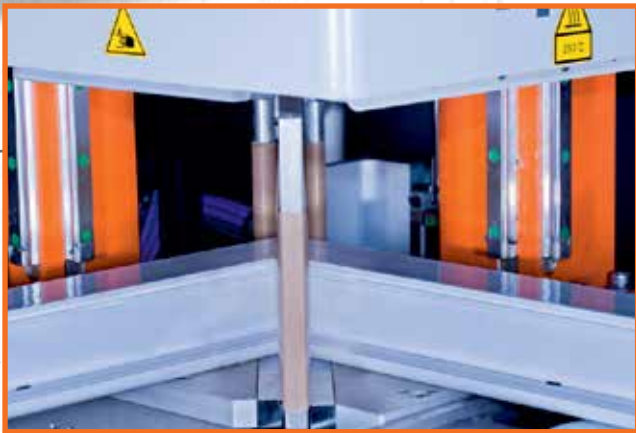

Technical Specifications:

Power Supply	: 220 V, 1 Ph, 50-60 Hz
Power Output	: 1,5 kw
Air Pressure	: 6-8 bar
Air Consumption	: 90 lt./ min.
Max. Welding Length	: Limitless
Min. Welding Length	: 300 mm
Max. Profile Width (180 Degree)	: 190 mm
Max. Profile Width (90 Degree)	: 160 mm
Max. Profile Width (60 Degree)	: 125 mm
Max. Profile Width (30 Degree)	: 85mm
Max. Welding Angle	: 180 degree
Min. Welding Angle	: 30 degree
Max. Profile Height	: 175mm
Min. Profile Height	: 37mm
Machine Height	: 1.670 mm
Machine Length	: 680 mm
Machine Width	: 700 mm
Machine Weight	: 210 kg



Technical Specifications:

Power Supply	: 220 V, 1 Ph, 50-60 Hz
Power Output	: 4,2 kw, 10.5A
Max. Welding Length	: 3.460 mm
Min. Welding Length	: 410 mm
Max. Profile Width	: 150 mm
Max. Profile Height	: 200 mm
Min. Profile Height	: 40mm
Air Pressure	: 6-8 bar
Air Consumption	: 100 lt./min.
Machine Height	: 1.900 mm
Machine Length	: 4.540 mm
Machine Width	: 1.570mm
Machine Weight	: 900 kg

schtec Four Head Inline Welding Machine




WDV 724
Four Head Inline Welding Machine

- Computer controlled (PID) heat control system to achieve welding strength within standards.
- Precise movement capability thanks to high precision linear guidance systems.
- Temperature, melting and bonding time that can be defined separately for each profile type.
- Ability to select profiles with a pneumatic revolver with 8 different positions.
- Welding heads can weld independently of each other.
- Each head can move independently for 90° and middle registration welding.
- Welding patterns can be changed quickly and easily.
- Height adjustable and foldable profile support system.
- "H" and "T" welding capability.
- Automatic middle register centering system.



Technical Specifications:	
Electricity Value	: 220-440V, 3~ 60 Hz
Min. Welding Size	: 320 mm
Power Consumption	: 9 kW, 25 A
Max. Profile Width	: 125 mm (90° Welding Angle)
Max. Profile Height	: 165 mm
Machine Length	: 5500 mm
Machine Height	: 2100 mm
Machine Width	: 1950 mm
Welding Angle	: 45°,90° and V
Machine Weight	: 1980 kg
Air Pressure	: 6-8 bar
Air Consumption	: 200 l/min 64
Max. Welding Size	: 4500 mm



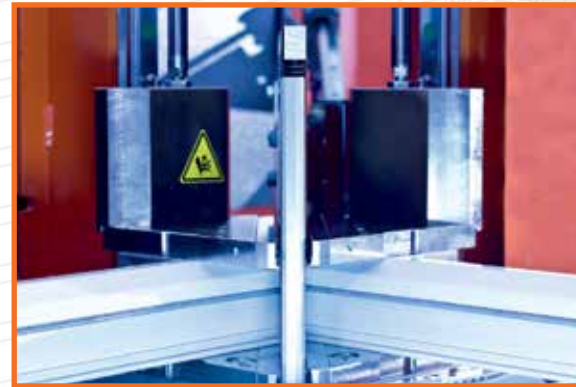

WM 740

Four Head Welding Machine

- Welds four corners of PVC profiles simultaneously at 90° with high sensitivity and strength.
- Beckhoff brand, high performance industrial PC operated by Windows XP Embedded. Fanless motherboard system works between 0°C- 55°C, and it comes with a 15" touch screen display.
- Data transfer via ethernet network connection, wireless network connection or USB interface.
- Welding parameters are defined by the user for every individual profile. (up to 10,000 profiles)
- Welding temperature, melting and welding times can be adjusted individually for each profile type.
- All machine axis are moved by hardened steel ball screw which provides accuracy and durability.
- Machine axis control system can identify cutting length defects up to 2 mm automatically.
- PC controlled (PIO) heat control system to obtain strong welding results in compliance with standards.
- Summer/ winter working mode is automatically selected, so the temperature adjustment is done easily.
- Horizontally placed strong mechanical heating plates distribute heat homogeneously without being affected from difficult working conditions.
- Easy and fast change for teflons by specially designed roll up teflon system.
- Easy and fast change for welding moulds.
- Works effectively by compressed air supplied to the system.
- White or colour profiles can be weld with the same sensitivity.
- Central lubrication system minimizes maintenance time.
- Reports can be created for daily, weekly, monthly and annual production.
- Light barriers and safety equipment confers to CE machine design with full security.
- Stable and accurate data transfer between this machine and the CNC corner cleaning machine via Industrial quality Ethernet connection.
- All the error messages and system status can be observed on screen by HMI software program developed by the Schtec software department.
- Service to the entire automation system, trouble shooting and fault removals can be done by remote connection.



Optional

- Gasket pressing system (GR 930)
- Barcode reader (BR 920)

Technical Specifications:

Power Supply	: 400 V, 3ph, 50-60 Hz
Power Consumption	: 11.5 kW, 28.75 A
Max. Welding Length	: 3.600 mm x 2.600 mm
Min. Welding Length	: 450 mm x 450 mm
Min. Welding Length	: 520 mm x 570 mm (with gasket pressing system)
Max. Profile Height	: 200 mm
Min. Profile Height	: 35 mm
Max. Profile Width	: 120 mm
Air Pressure	: 6-8 bar
Air Consumption	: 70 lt. /min.
Machine Height	: 1.880mm
Machine Length	: 4.980 mm
Machine Width	: 4.750 mm
Machine Weight	: 1.920 kg



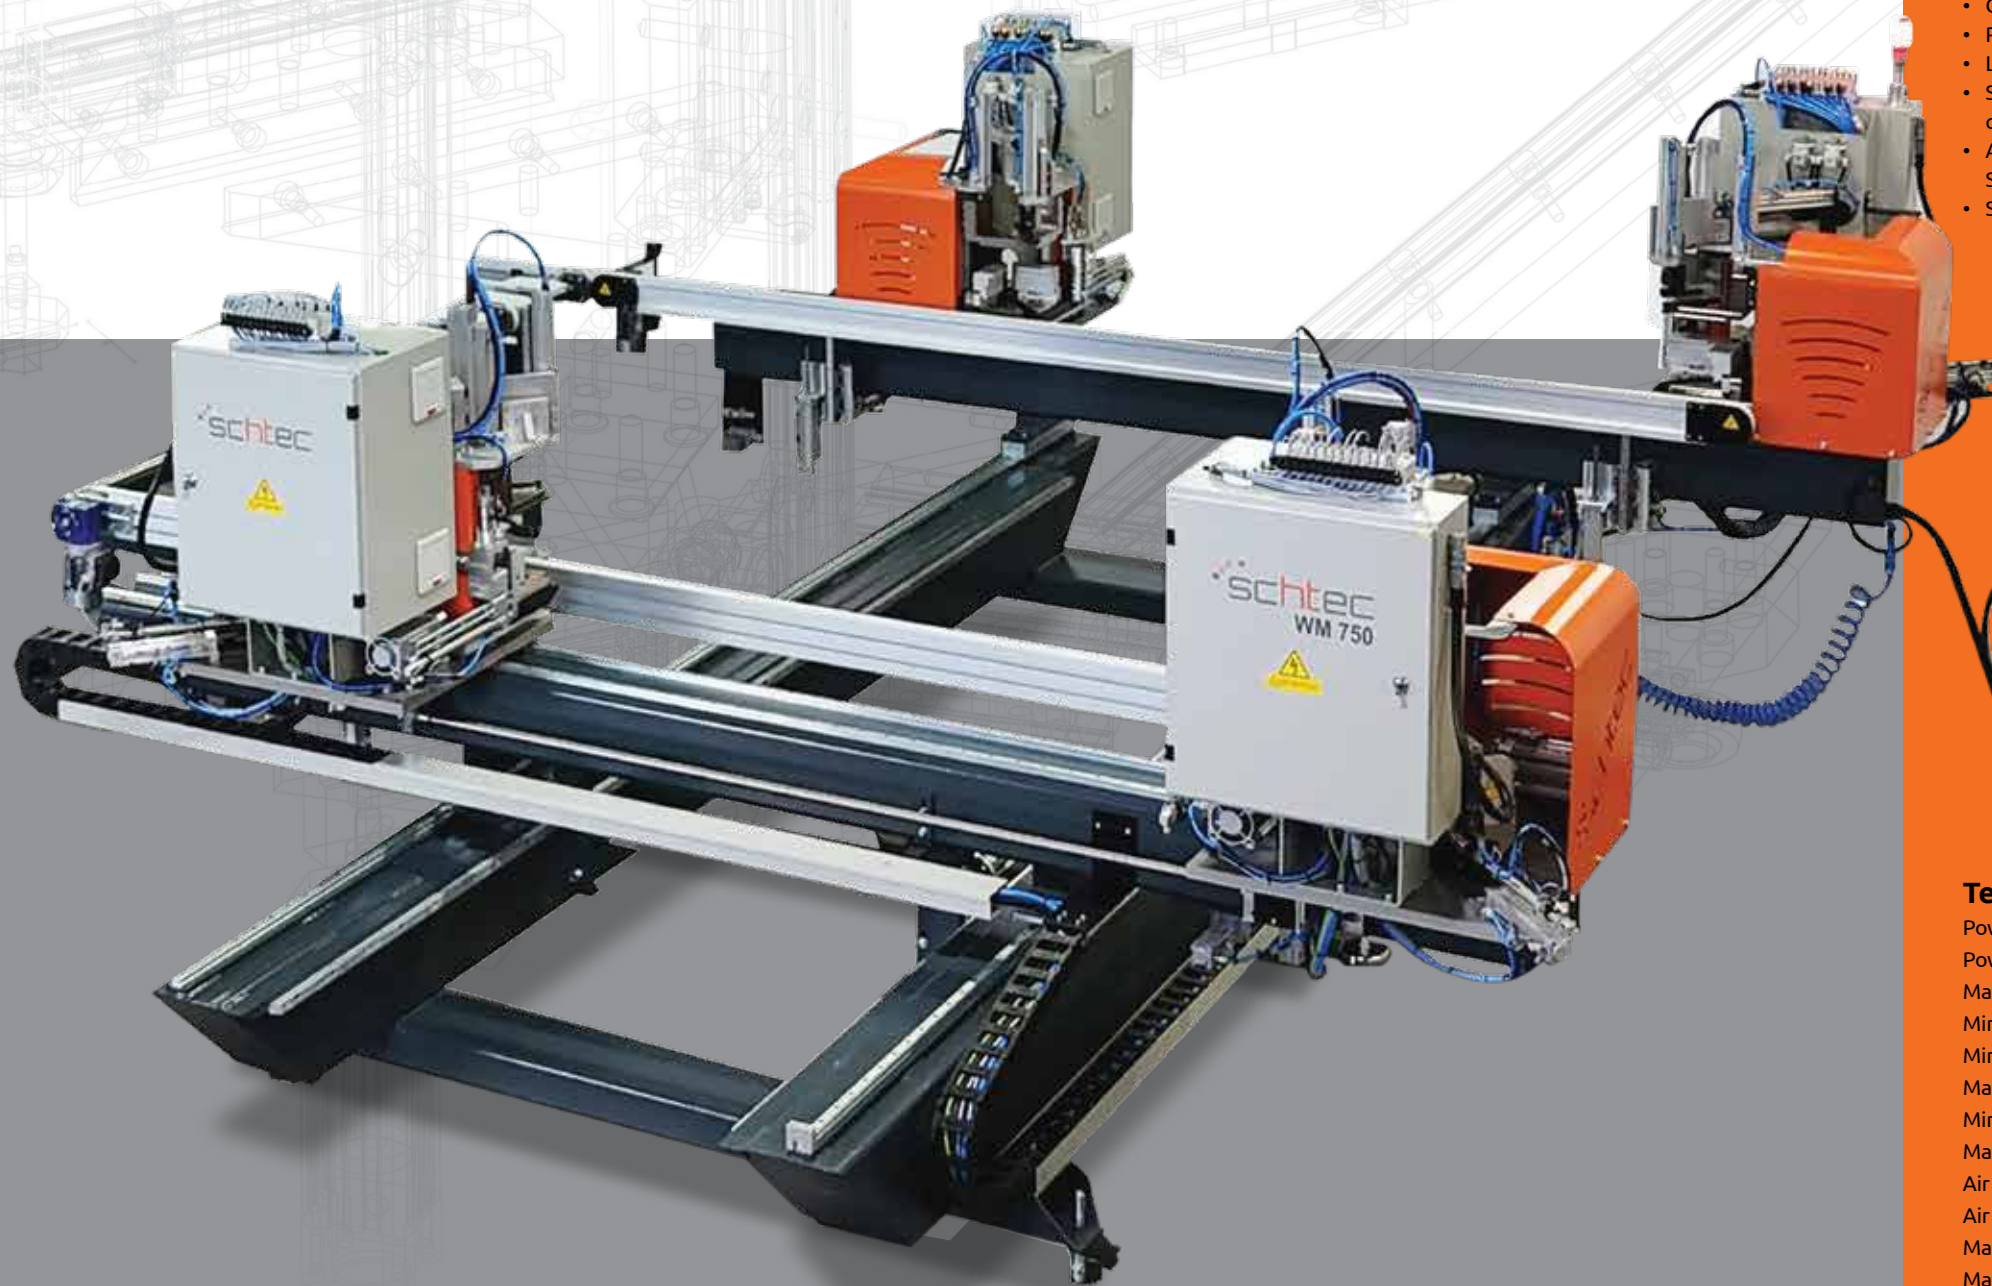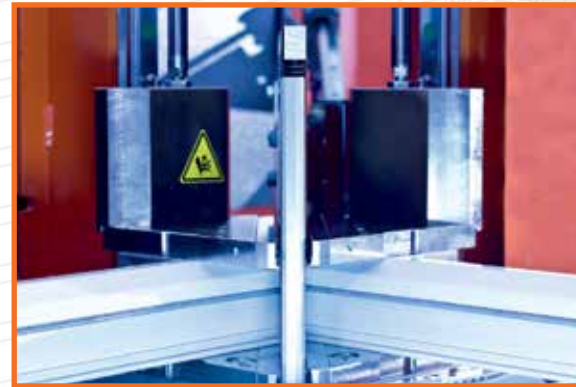

WM 750

Four Head Welding Machine

- Welds four corners of PVC profiles simultaneously at 90 °with high sensitivity and strength.
- Machine axes are moved by Servo motor system. (3 Servo motor controlled axes)
- Specially developed parallel welding technology that improves welding quality and strength.
- Internally engineered design for automatic selection of 0.2 and 2 mm welding range.
- Beckhoff brand, high performance industrial PC operated by Windows XP Embedded. Fanless motherboard system works between 0°C – 55°C, and it comes with a 15" touch screen display.
- Data transfer via ethernet network connection, wireless network connection or USB interface.
- Welding parameters are defined by the user for every individual profile. (up to 10,000 profiles)
- Welding temperature, melting and welding times can be adjusted individually for each profile type.
- All machine axes are moved by hardened steel ball screw which provides accuracy and durability.
- Depending on the torque values of the servo motors, melting the lengths up to 2 mm and bringing them to the desired size.
- PC controlled (PID) heat control system to obtain strong welding results in compliance with standards.
- Summer / winter working mode is automatically selected,so the temperature adjustment is done easily.
- Horizontally placed strong mechanical heating plates distribute heat homogeneously without being affected from difficult working conditions.
- Easy and fast change for teflons by specially designed roll up teflon system.
- Easy and fast change for welding moulds.
- Works effectively by compressed air supplied to the system.
- White or colour profiles can be weld with the same sensitivity.
- Central lubrication system minimizes maintenance time.
- Reports can be created for daily, weekly, monthly and annual production.
- Light barriers and safety equipment conforms to CE machine design with full security.
- Stable and accurate data transfer between this machine and the CNC Corner Cleaning Machine via Industrial quality Ethernet connection.
- All the error messages and system status can observed on screen by HMI software program developed by the Schtec software department.
- Service to the entire automation system, trouble shooting and fault removals can be done by remote connection.

Optional


- Gasket pressing system (GR 930)
- Barcode reader (BR 920)



Technical Specifications:

Power Supply	: 400 V, 3 Ph, 50-60 Hz
Power Consumption	: 12 kW, 32 A
Max. Welding Length	: 3.600 mm x 2.600 mm
Min. Welding Length	: 400 mm x 400 mm
Min. Welding Length	: 520 mm x 570 mm (with gasket pressing system)
Max. Profile Height	: 200 mm
Min. Profile Height	: 35 mm
Max. Profile Width	: 120 mm
Air Pressure	: 6-8 bar
Air Consumption	: 70 lt. /min.
Machine Height	: 1.880 mm
Machine Length	: 5.350 mm
Machine Width	: 4.000 mm
Machine Weight	: 2.100 kg



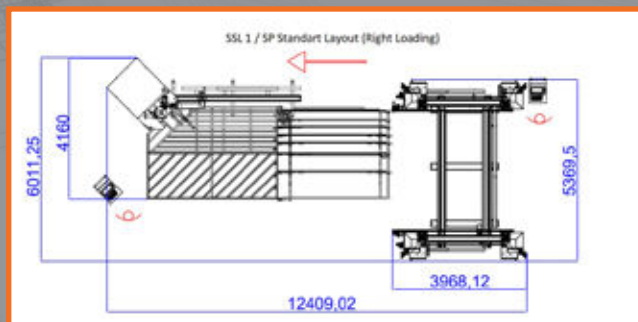

SSL 1 - SSL 1/SP

Four Head Welding and CNC Corner Cleaning Automation Line

- An integrated system which consists of a WM 740 four point welding machine, a CS 810 cooling and buffer station, a TS 820 Robotics design turning station and a CM 620 CNC Corner Cleaner.
- All process is controlled by industrial PC systems from welding to cooling, to turning and finally to cleaning.

Opsiyonlar

- SSL 1 / SP (WM 750: Servo Motors, Parallel Joint System, Size correction system controlled by torque control mode on servo motors)

TS 820

Turning Station with Robotic Arm

- High speed and high accuracy turning operation via a robotic system with strong and fast mechanical turning arms.
- Stable turning process with highly durable turning arms.
- Turning speed calculation is done automatically for each frame's geometric shape, reinforcement steel weight and all other factors included.
- All machine axis are moved by hardened steel rack and pinion gear system which provides accuracy and durability.
- Turning robot spends the minimum energy and the least amount of time by synronochizing its actions with the CNC machine's fence system.
- Its compact design allows it to occupy the smallest working area possible, which is 12 m² less than its competitors.
- Turning time is 1 second for small frames and between 1,5 - 4 seconds for all other sizes.

Technical Specifications:

Voltage	: 400 V AC, 3 Ph, 50/60 Hz
Power Consumption	: 3 kW, 7,5 A
Min. Outer Frame Dimension	: 450 x 450 mm
Max. Outer Frame Dimension	: 2.300 x 2.300 mm Max. Profile
Height	: 160 mm
Min. Profile Height	: 35 mm
Max. Profile Width	: 130 mm
Machine Weight	: 850 kg

CS 810

Cooling and Buffer Station

- Works between a corner cleaner and a welding machine.
- Provides cooling time for the profiles coming from the welding machine prior to sending them the corner cleaning machine.
- Cooling time is set through the welding machine's control panel.
- Helps increase the production capacity by storing the profiles coming from the welder before sending them to the corner cleaner.

Technical Specifications:

Power Supply	: 400 V, 3ph, 50-60 Hz
Power consumption	: 1,5kW, 3 A
Air Pressure	: 6-8 bar
Machine Height	: 1.050 mm
Machine Length	: 3.350 mm
Machine Width	: 2.740 mm
Machine Weight	: 315 kg





CC 254 Corner Cleaning Machine (4 Cutters)

- High quality corner cleaning result through durable special knives on Foiled or white welded profiles For bottom and upper surfaces.
- High quality corner cleaning result through 4 different type of end milling tools processing edge corners.
- Corner cleaning stability with automatic centering system For welded Frames.
- High precision on profile stabilization with vertical clamps.
- Support arm is standard equipment.



CM 610 CNC Corner Cleaning Machine

- Corner cleaning stability with 2 axis high-speed servo controlled axis.
- Automatic knife selection for selected profile foil type. (colour/ white)
- High quality corner cleaning result through durable special knife and bit designs.
- Faultless cleaning of surface burrs with automatic measurement system.
- File transfer by USB.
- Easy programming support via DXF,DWG file extensions.
- Central lubrication system for all bearings, axis and sliding bearings.
- 10" Touchscreen.
- All alarm sand messages can shown on the machine interface by way of software which developed by SCHTEC Software R&D Department.



Optional

- Corner Cleaning Blades.





Technical Specifications:

Voltage	: 400 V AC, 3 Ph, 50/60 Hz
Total Power	: 1,1 kW
Spindle Speed	: 3.000 rpm
Air Pressure	: 6-8 bar
Air Consumption	: 95 lt./ min.
Max.Knife Diameter	: 160 mm
Max.Profile Width	: 120 mm
Max.Profile Height	: 90mm
Min.Profile Height	: 40mm
Machine Height	: 1.700 mm
Machine Lenght	: 1.360 mm {With Support Table 2.170 mm}
Machine Width	: 960 mm {With Support Table 2.140 mm}
Machine Weight	: 360 kg

Technical Specifications:

Voltage	: 230 V AC, 1 PH, 50-60Hz
Power Consumption	: 7 kW, 18 A – 5,4 kW, 13,5 A
Air Pressure	: 6-8 bar
Air Consumption	: 110 lt./ min.
Saw Blade Details	: ø 250 x ø 30 x 3.2 mm, Z=80
Saw Blade rpm	: 5.200 rpm
Drillers rpm	: 14.000 rpm
Max. Axes Speed	: 25 m./min.
Max.Outter Frame Dimension	: Limitless
Max. Profile Height	: 140 mm
Min. Profile Height	: 35 mm
Max. Profile Width	: 120 mm
Machine Height	: 1.900 mm
Machine Lenght	: 2.560 mm
Machine Width	: 900 mm
Machine Weight	: 600 kg
Tool Count	: 11 piece
Capacity	: 320-360 frame/ 8 hours (1 corner cleaning time based on)

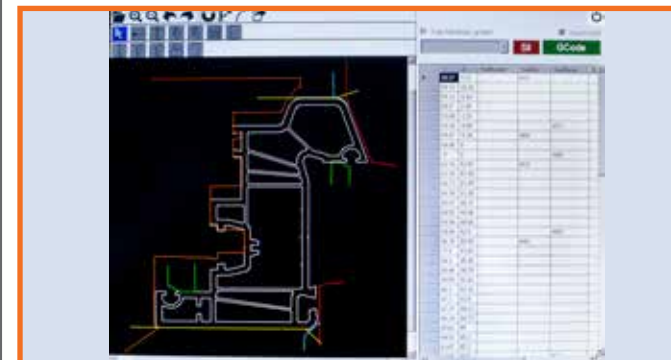

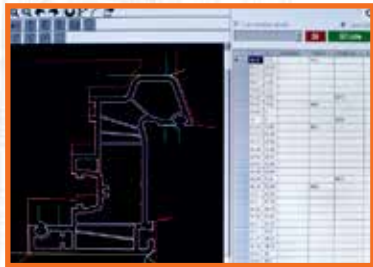

CM 620
CNC Corner Cleaning Machine

- High speed and accuracy corner cleaning with Servo System controlled 2 Axes.
- Automatic knife selection for selected profile foil type. (colour/ white)
- High quality corner cleaning result through durable special knife and bit designs.
- High quality cleaning results on surfaces by automatic measurement system.
- Industrial PC Based Control System. (Beckhoff)
- Remote desktop connection by way of Wifi or Network connection.
- File transfer by USB or network.
- Easy programming support via DXF, DWG file extensions.
- Central lubrication system for all bearings, axis and sliding bearings.
- 15" Touchscreen.
- High performance industrial PC working between QC- SSC with operating system Windows XP Embedded and fanless design.
- All alarm sand messages can shown on the machine interface by way of software which developed by SCHTEC Software R&D Department.
- Byway of using private remote desktop connection, which developed by SCHTEC Software R&D Department, expert service technicians can connect true machine automation system and machine interface for fixing or determine problems.



Optional

- Additional tool for sliding frames inside surface cleaning
- Additional tool for monoblock frames inner surface cleaning
- Expanding to Single Line by way of connection to 4 point welder with 2 Axes robotic design turning table.
- Earning 12 m² on working area with benefit of the brand new design turning table placed on the corner of the line



Technical Specifications:

Voltage	: 400 V AC , 3 Ph, 50/60 Hz
Power Consumption	: 7 kW ,18 A
Air Pressure	: 6-8 bar
Air Consumption	: 110 lt./ min.
Saw Blade Details	: 0 250 x 0 30 x 3.2 mm, Z=80
Saw Blade rpm	: 5.200 rpm
Drillers rpm	: 14.000 rpm
Max. Axes Speed	: 45 m./min.
Max.Cutter Frame Dimension	: Limitless (Automatic Mode: 2.300x2.300 mm)
Min.Cutter Frame Dimension	: 380 x 380 mm (Automatic Mode :450 x 450 mm)
Max. Profile Height	: 160 mm (Depending on the profile type, different regions can be cleaned) 35mm
Min. Profile Height	: 130mm
Max. Profile Width	: 1.900mm
Machine Height	: 2.150mm
Machine Length	: 1.250 mm
Machine Width	: 1.250 mm
Machine Weight	: 960 kg
Tool Count	: 12 piece
Capacity	: 400-440 frame/ 8 hours (1 corner cleaning time based on)



GA 300
Glass Assembly Machine

- Fast installation of glass on the windows and doors.
- Glazed joinery transferring to package on rollers
- Parallel block clamps allow you to set an appropriate balance.
- Raising 50cm for a better workspace.



Technical Specifications:

Max.Window Length (X axis)	: 2.450 mm
Min.Window Width (Y axis)	: 2.700 mm
Air Pressure	: 6-8 bar
Air Consumption	: 12 lt./min.
Machine Height	: 2.420 mm
Machine Length	: 3.060 mm
Machine Width	: 910 mm
Machine Weight	: 370 kg






SA 280

Sash Assembly Station

Different series of different sizes of doors/ windows, all used tilt and turn accessories on the surface of the frame without using the meter and pen, adjustable to different profiles, without the need to form and pattern, enables serial and high-quality installation in a standard way.

- Sash assembly table.
- Automatic centering system of the sash.
- Automatic measurement system for espagnolette and scissors.
- Cutting punch for espagnolette and scissors.
- The automatic screwdriver, automatic screw feeding.
- Laser screw alignment system.
- Triple drilling holes for the handle.
- Semiautomatic adjustable hinge drilling and manual hinge drilling.
- Screwing group.
- Milling channel for espagnolette.
- Shelf for accessories.

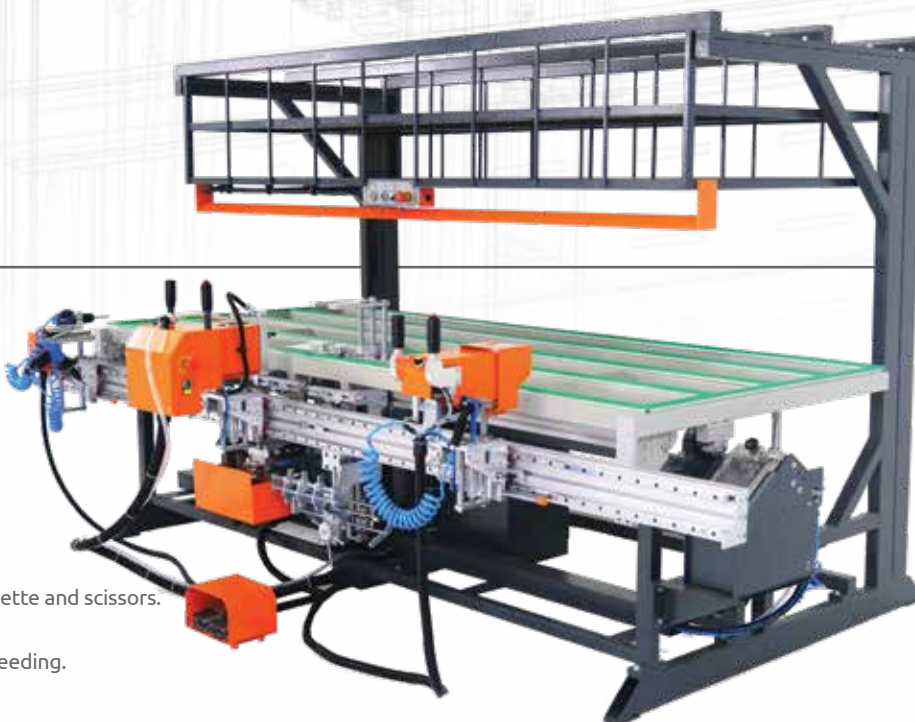


Technical Specifications:

Total Power	: 3 kW
Air Pressure	: 6-8 bar
Air Consumption	: 245 lt./min.
Minimum window width	: 330 mm
Maximum window width	: 2.500 mm
Machine Height	: 2.030 mm
Machine Length	: 3.255 mm
Machine Width	: 2.010 mm
Machine Weight	: 615 kg



schtec

25-30 Windows (50-60 Frames)

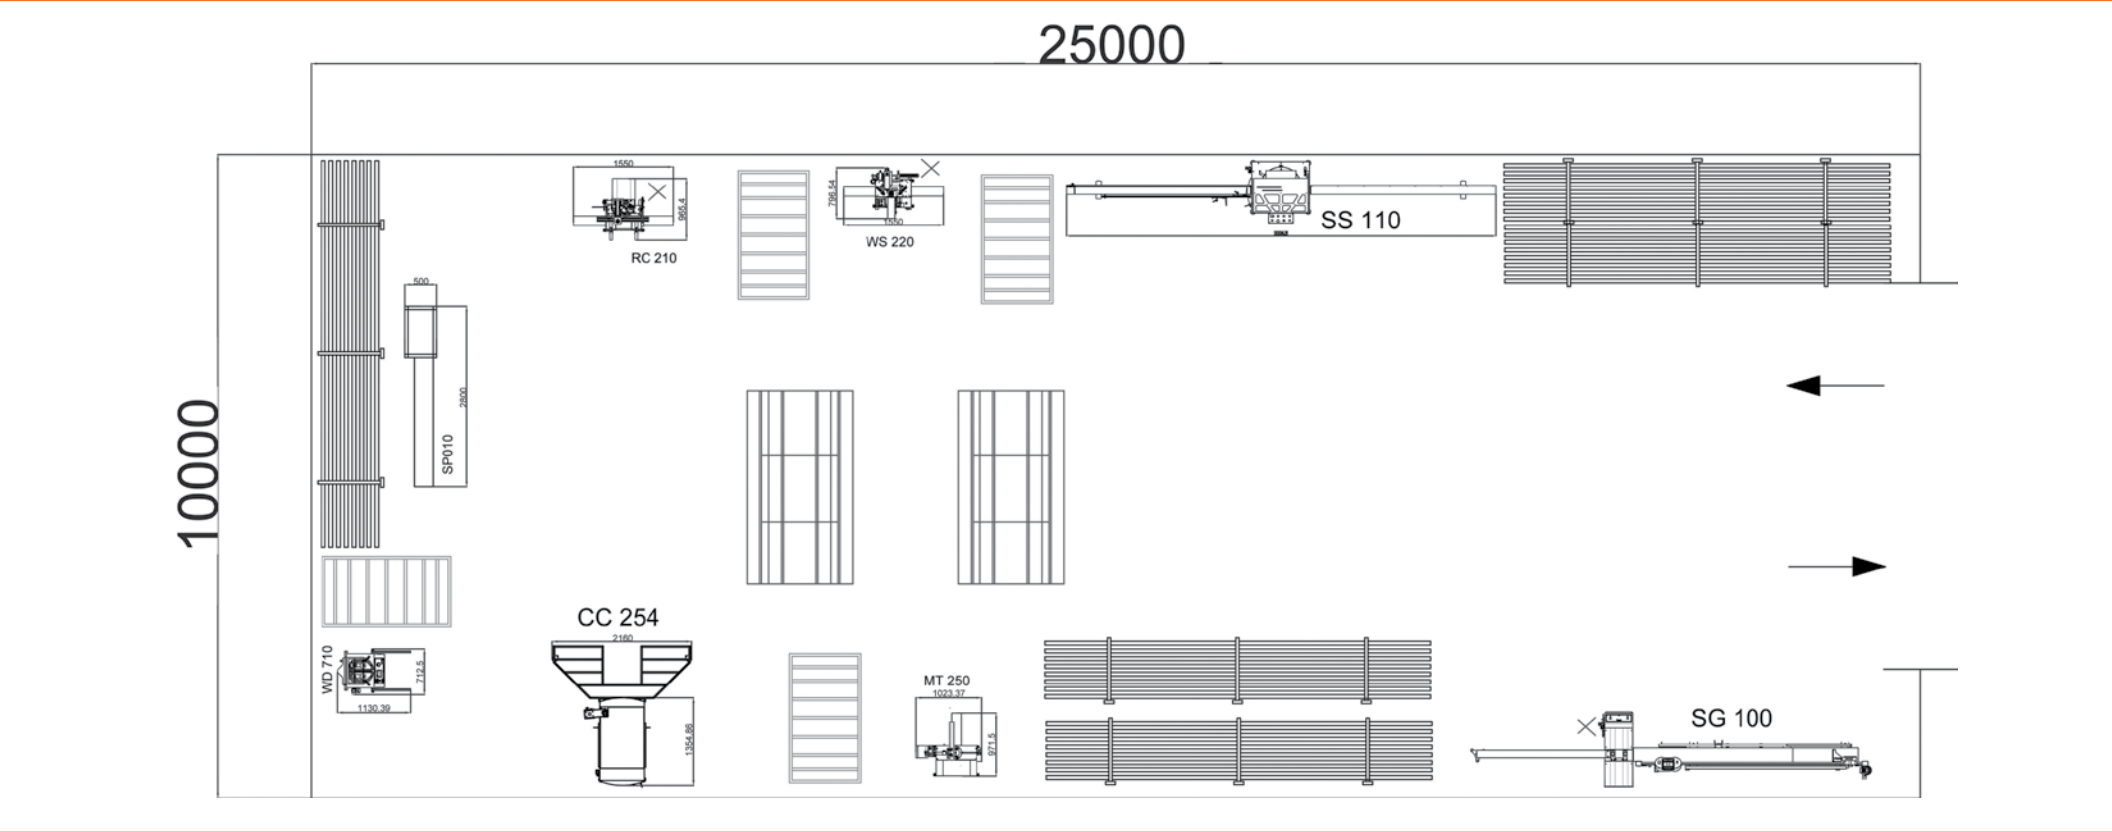


• Dimensions: mm

25-30 Windows(S0-60 Frames)

NO	MODEL	DEFINITION	PIECE
1	SS 110	Single Head Cutting Machine	1
2	RC 210	Copy Router with Triple Drill	1
3	WS 220	Automatic Triple Water Slot Router	1
4	MT 250	Automatic End Milling Machine	1
5	SG 100	Glazing Bead Saw	1
6	WD 710	Single Head Welding Machine	1
7	CC 254	Corner Cleaning Machine	1

50-60 Windows (100-120 Frames)

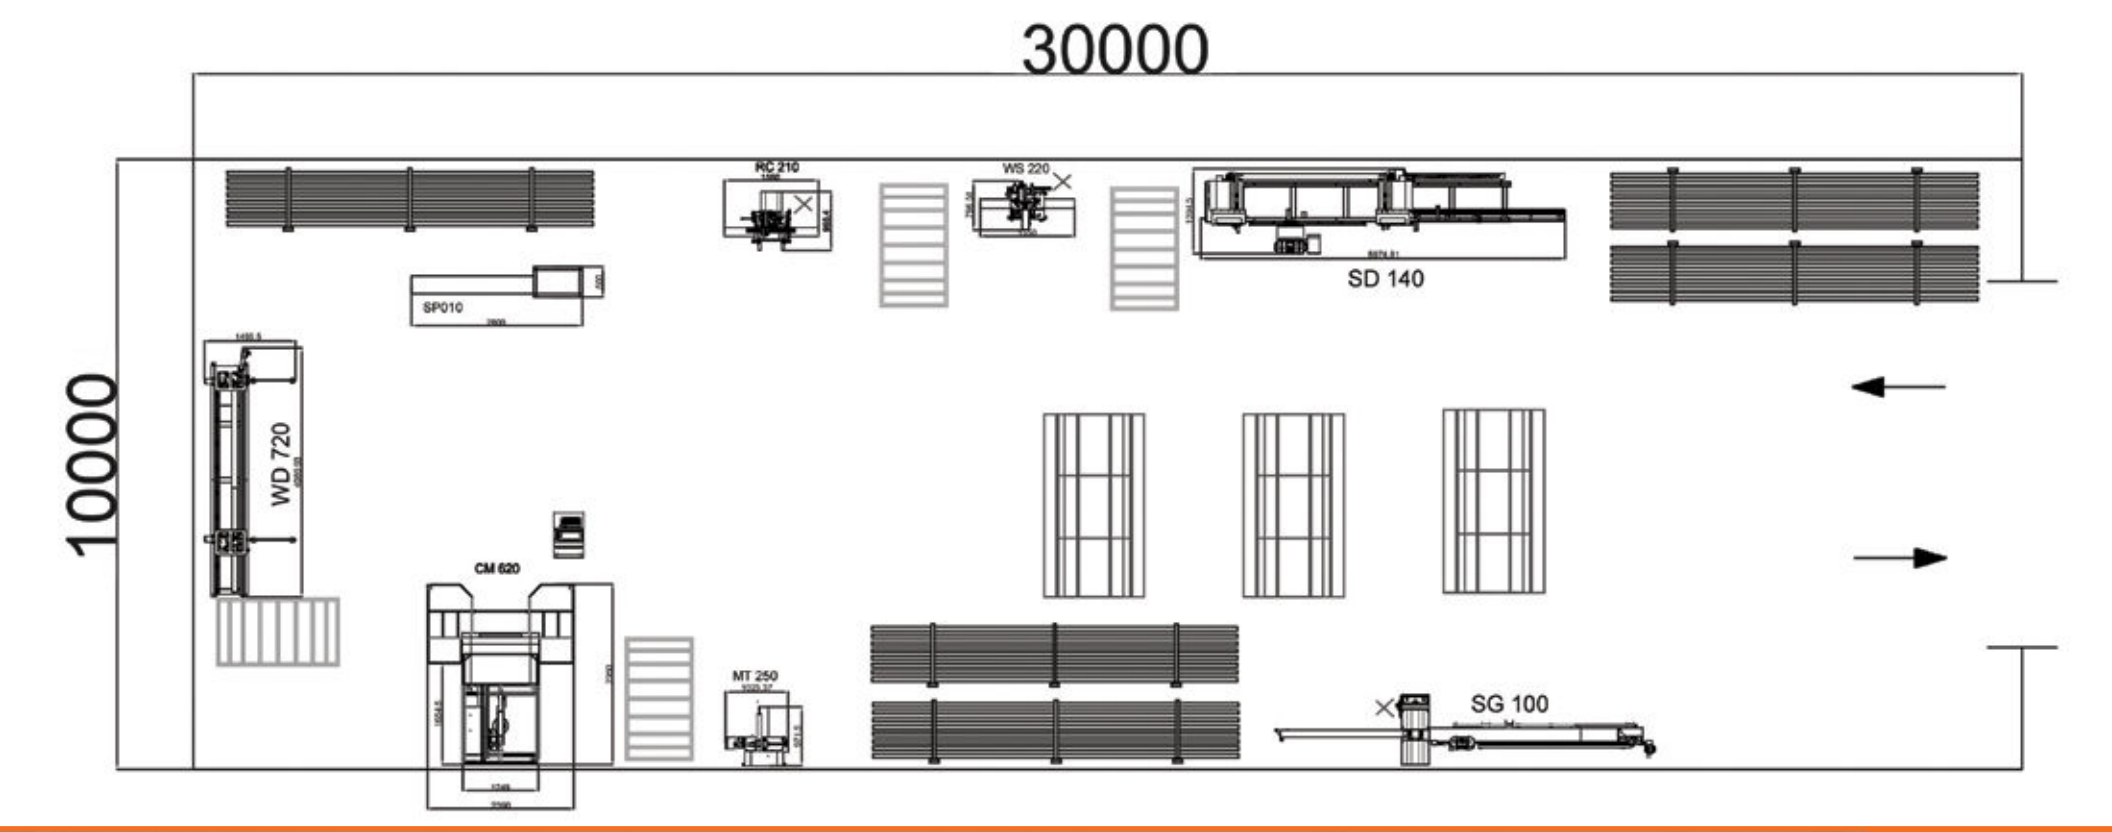


• Dimensions: mm

50-60 Windows(100-120 Frames)


NO	MODEL	DEFINITION	PIECE
1	SD 140	Automatic Double Head Cutting Machine	1
2	RC 210	Copy Router with Triple Drill	1
3	WS 220	Automatic Triple Water Slot Router	1
4	MT 250	Automatic End Milling Machine	1
5	SG 100	Glazing Bead Saw	1
6	WD 720	Double Head Welding Machine	1
7	CM 610	CNC Corner Cleaning Machine	1

180-200 Windows (360-400 Frames)

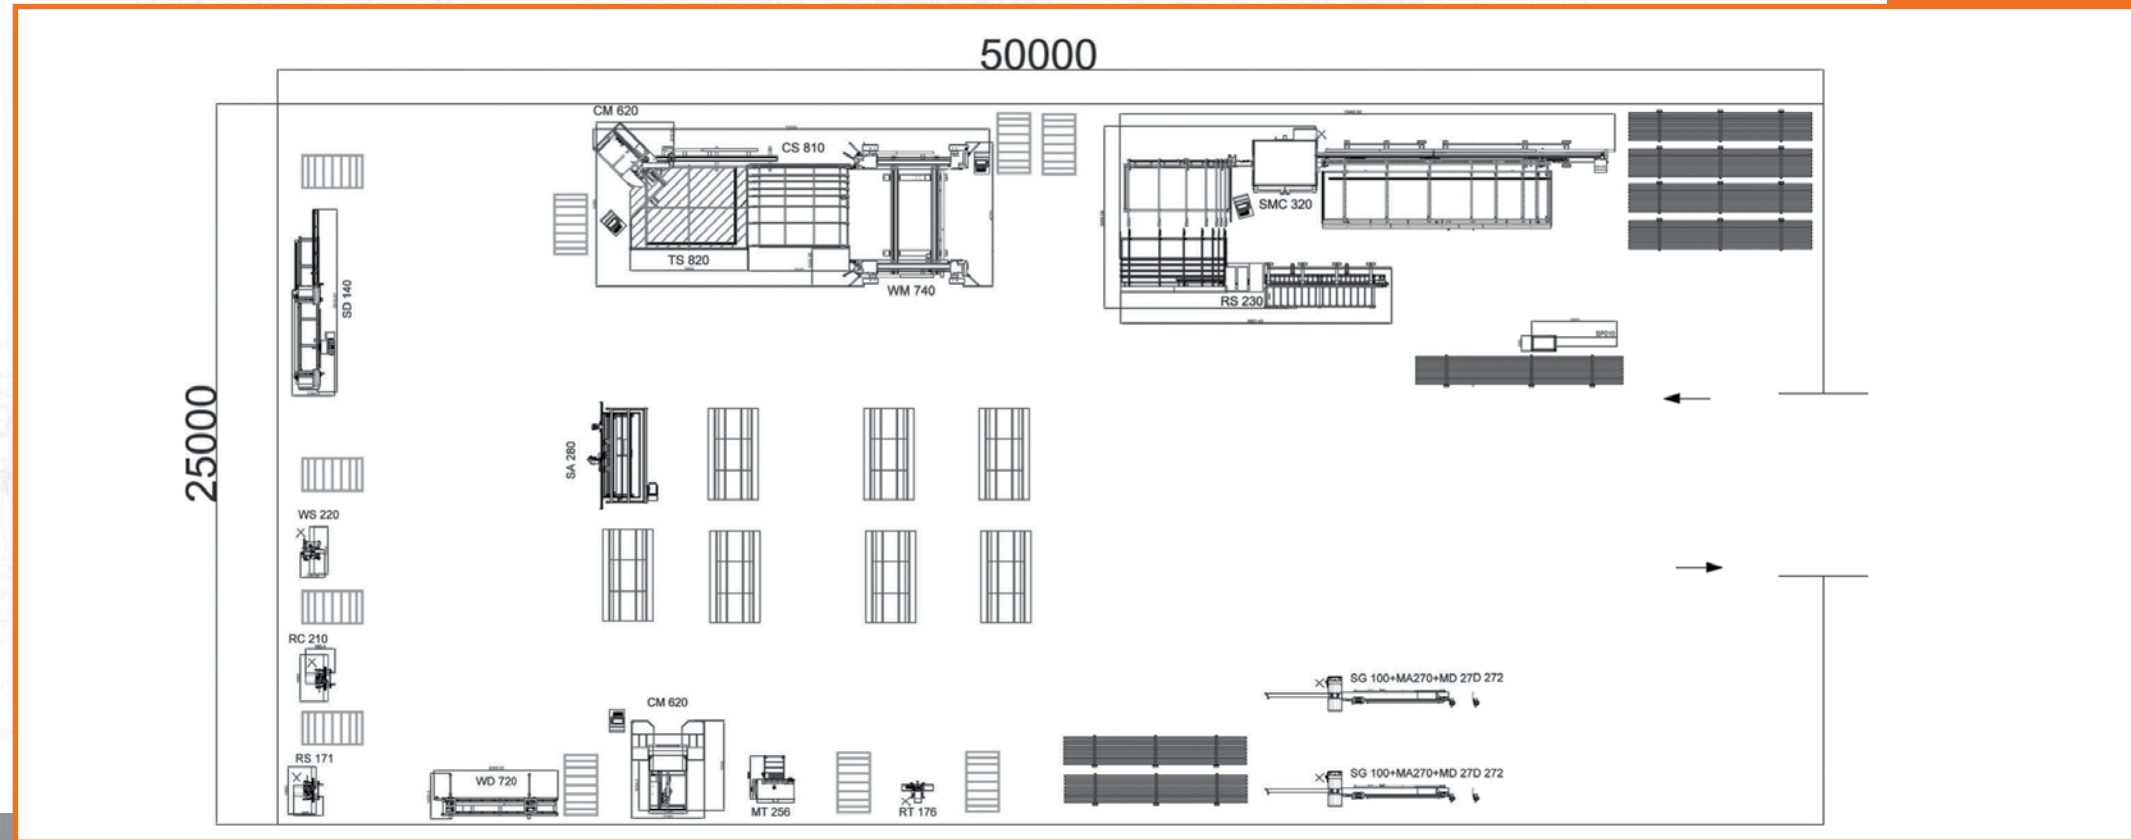

• Dimensions: mm

240-260 Windows (480-520 Frames)

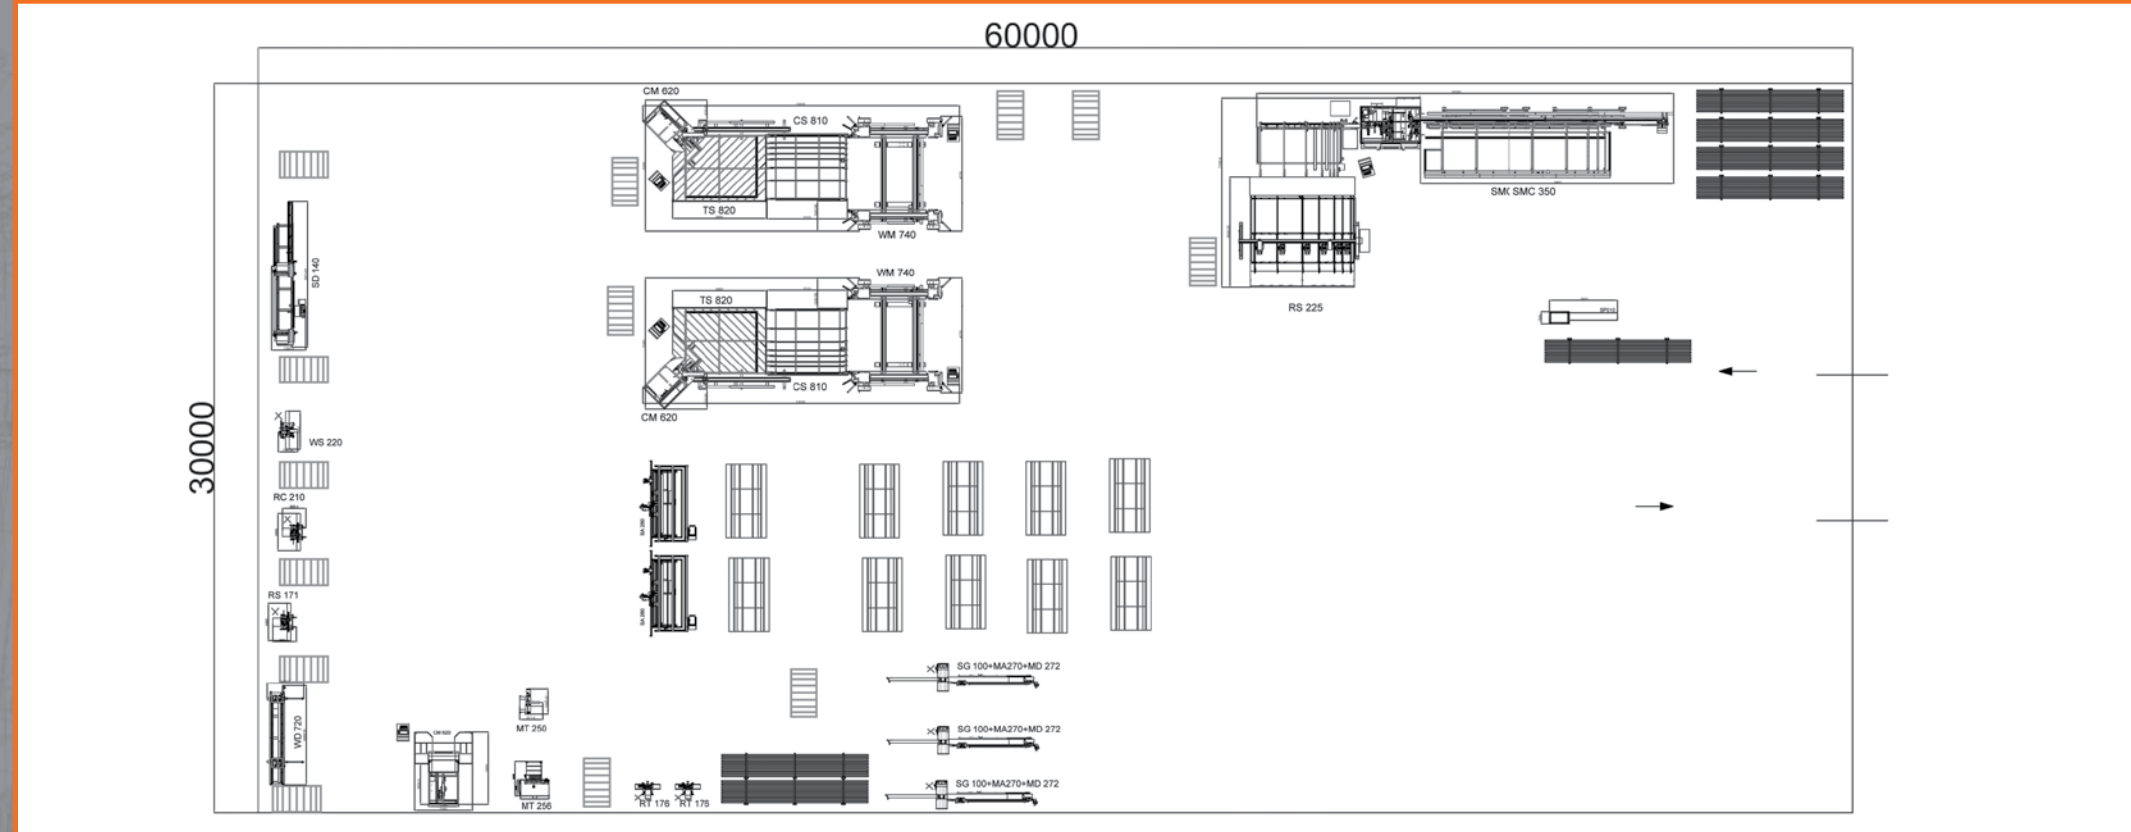

• Dimensions: mm


180-200 Windows (360-400 Frames)

NO	MODEL	DEFINITION	PIECE
1	SMC 320	Profile Machining and Cutting Center	1
2	RS 230	Fully Automatic Double Screwing and Triple Drilling Center	1
3	WM 740	Four Head Welding Machine	1
4	CS 810	Buffer and Cooling Station	1
5	TS 820	Turning Station with Robotic Arm	1
6	CM 620	CNC Corner Cleaning Machine	1
7	SD 140	Automatic Double Head Cutting Machine	1
8	WS 220	Automatic Triple Water Slot Router	1
9	RC 210	Copy Router with Triple Drill	1
10	RS 171	Vertical Reinforcement Screwing Machine	1
11	WD 720	Double Head Welding Machine	1
12	CM 620	CNC Corner Cleaning Machine	1
13	MT 256	Multiple End Milling Machine	1
14	RT 176	Mullion Connector Screwing Machine	1
15	SG 100	Glazing Bead Saw	2
16	MA 270	Automatic Measurement System	2
17	MD 272	Electronic Digital Measuring Device	2
18	SA 280	Sash Assembly Station	1

240-260 Windows (480-520 Frames)

NO	MODEL	DEFINITION	PIECE
1	SMC 360	Profile Machining and Cutting Center	1
2	RS 225	Profile Screwing Center	1
3	WM 740	Four Head Welding Machine	2
4	CS 810	Buffer and Cooling Station	2
5	TS 820	Turning Station with Robotic Arm	2
6	CM 620	CNC Corner Cleaning Machine	2
7	SD 140	Automatic Double Head Cutting Machine	1
8	WS 220	Automatic Triple Water Slot Router	1
9	RC 210	Copy Router with Triple Drill	1
10	RS 171	Vertical Reinforcement Screwing Machine	1
11	WD 720	Double Head Welding Machine	1
12	CM 620	CNC Corner Cleaning Machine	1
13	MT 256	Multiple End Milling Machine	1
14	MT 250	Automatic End Milling Machine	2
15	RT 176	Mullion Connector Screwing Machine	3
16	SG 100	Glazing Bead Saw	3
17	MA 270	Automatic Measurement System	3
18	MD 272	Electronic Digital Measuring Device	2
19	SP 010	Reinforcement Cutting Press Machine	2
20	SA 288	Sash Assembly Station	

180-200 Windows (360-400 Frames)

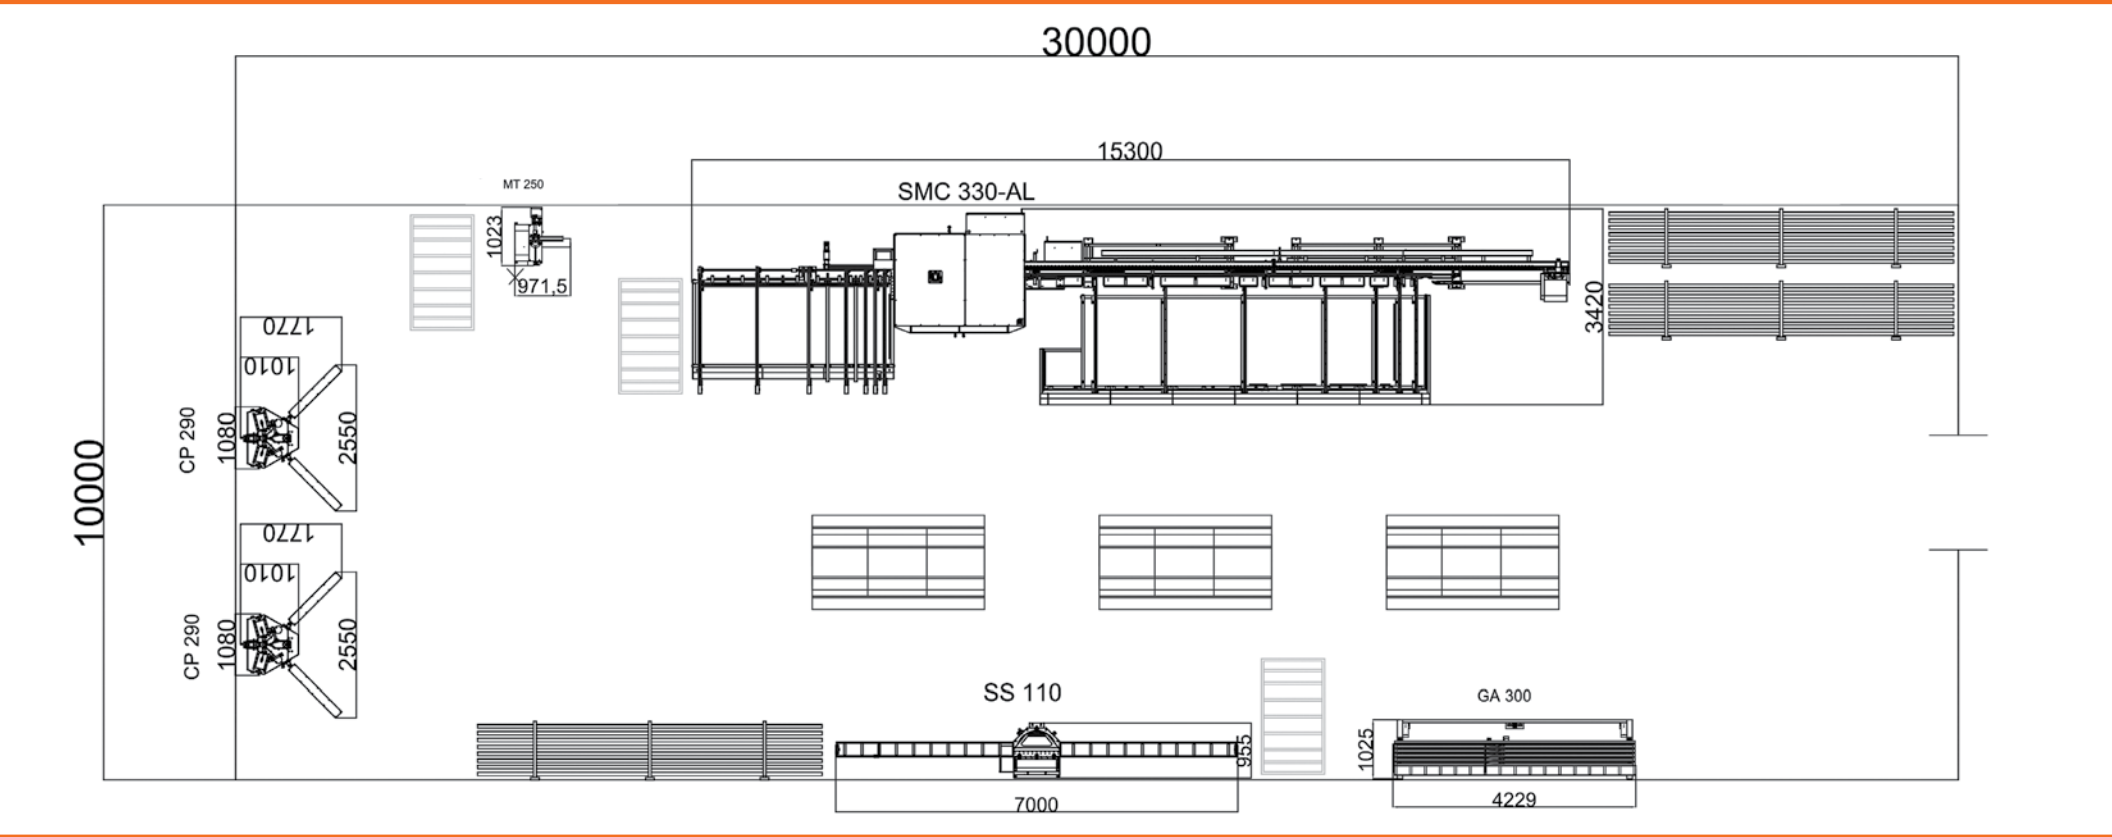


• Dimensions: mm

180-200 Windows (360-400 Frames)

NO	MODEL	DEFINITION	PIECE
1	SMC 330 – AL	Aluminium Profile Processing & Cutting Center	1
2	MT 250	Automatic End Milling Machine	1
3	CP 290	Corner Crimping Machine	1
4	SS 110	Single Head Cutting Machine	1
5	GA 300	Glass Assembly Machine	1

240-260 Windows (480-520 Frames)

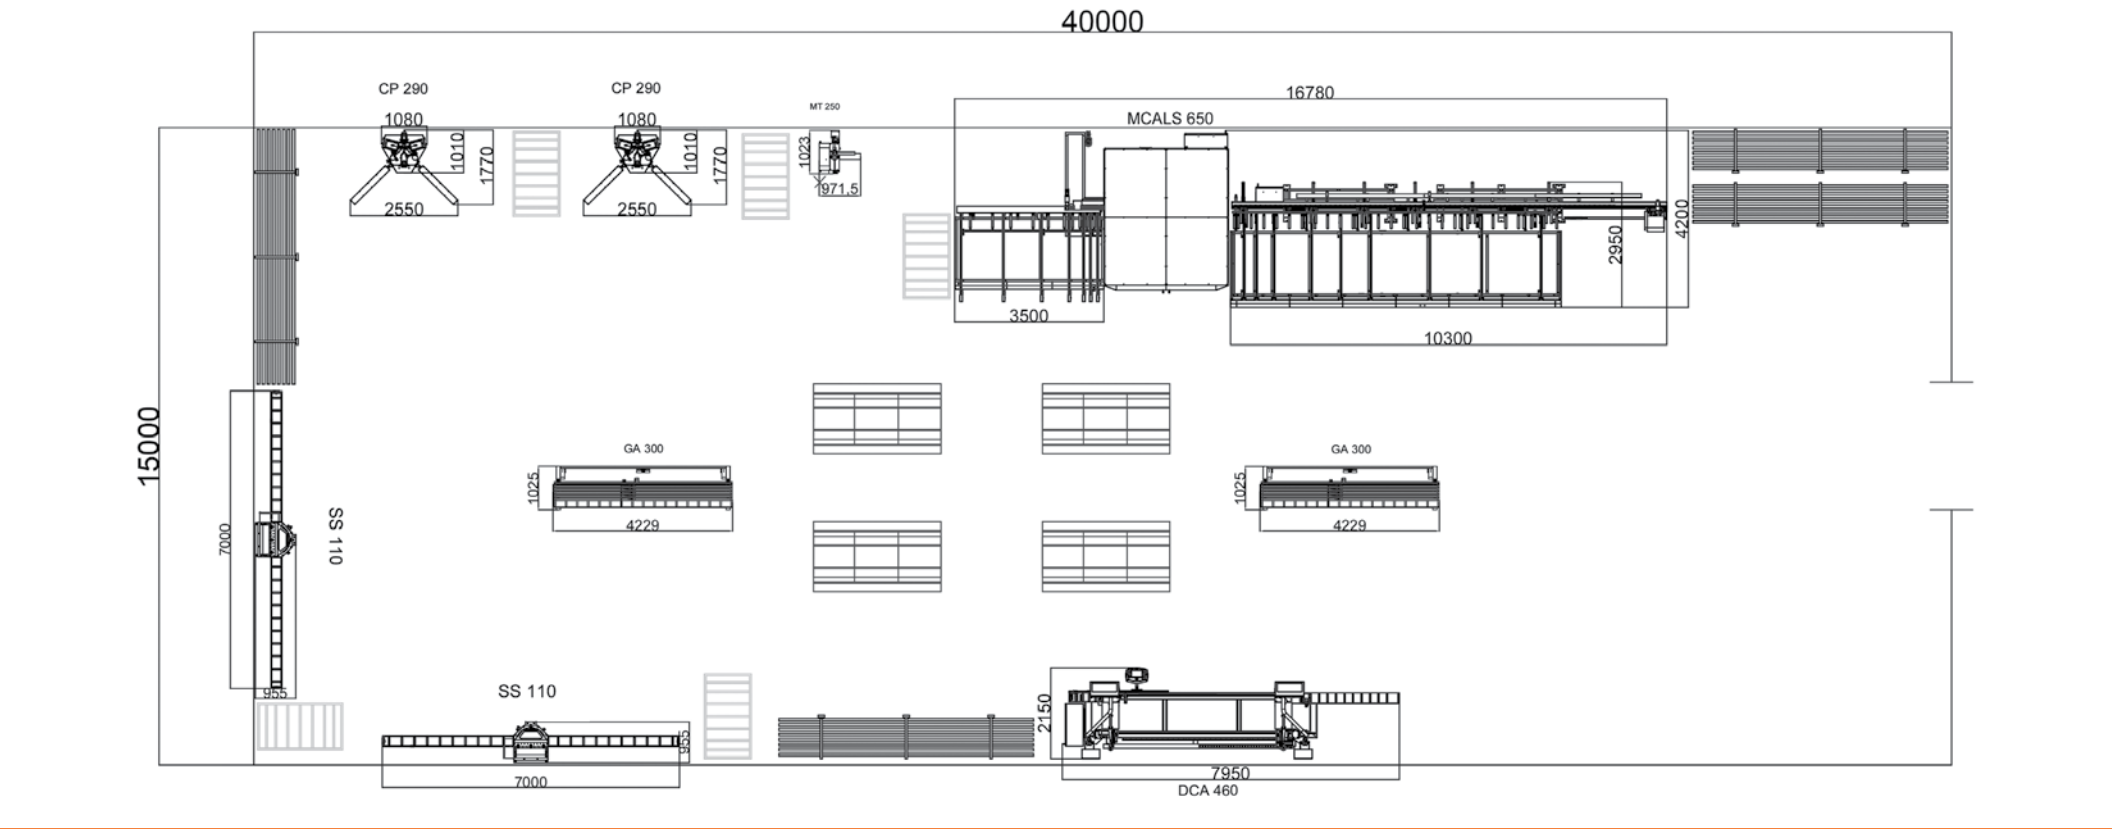

• Dimensions: mm

240-260 Windows (480-520 Frames)

NO	MODEL	DEFINITION	PIECE
1	MCALS 650	Alüminyum Profil İşleme ve Kesim Merkezi	1
2	MT 250	Automatic End Milling Machine	1
3	CP 290	Corner Crimping Machine	2
4	SS 110	Single Head Cutting Machine	2
5	DCA 460	Double Head Aluminium & PVC Cutting Machine	1
6	GA 300	Glass Assembly Machine	2

schtec

Our Solution Partners

BECKHOFF

EATON
Powering Business Worldwide

FESTO

SMC

Schneider
Electric

murrplastik

OMRON

MOTOVARIO
HEART OF MOTION

THK
The Mark of Linear Motion

MG
M

MURR
ELEKTRONIK
stay connected

HELUKABEL®

ATLANTA
DRIVE SYSTEMS

SKF

Mink
Bürsten

NEUGART

SICK
Sensor Intelligence.

SCHAEFFLER
FAG

PHOENIX
CONTACT

"where quality and technology combine with experience"

schtec



Schtec Makine San. ve Tic. A.Ş.

PVC & Aluminium Profiles Processing Machinery

İkitelli Ö.S.B Suleyman Demirel Bulvari
Heskoop-İs Modern Sanayi Sitesi J Blok
Floor: 3 No: 44 34490, Başakşehir
İstanbul / Turkey

Phone: +90 (212) 852 01 61
Fax : +90 (212) 852 88 87

www.schtec.com
info@schtec.com.tr

